




HENCO PRE-INSULATED MULTILAYER PIPE

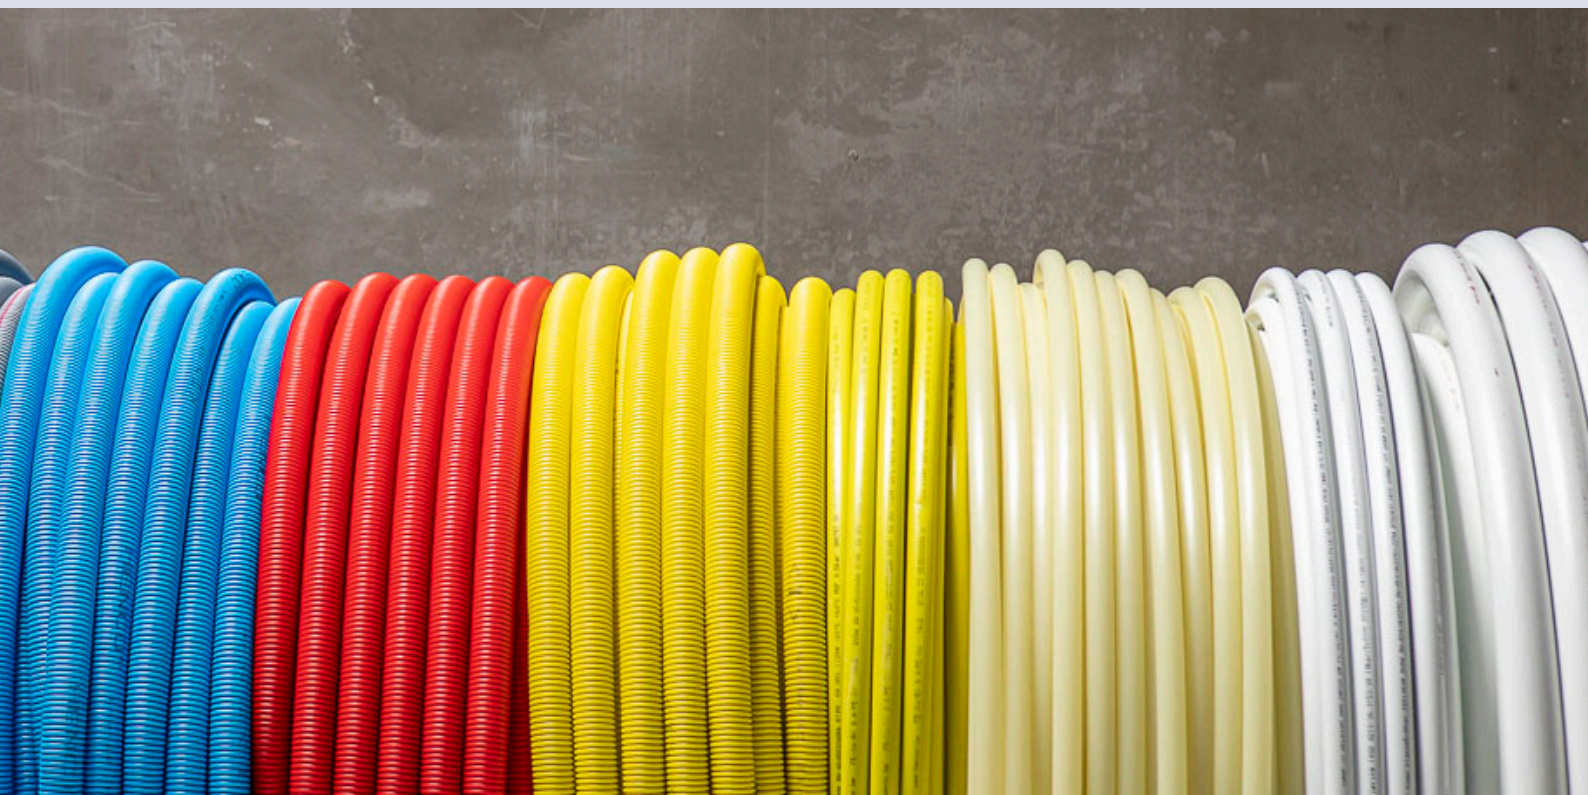

WE CARE TO CONNECT

Henco Industries NV
Belgium

Toekomstlaan 27
2200 Herentals

+32 14 28 56 60
info@henco.be



PRE-INSULATED HENCO MULTILAYER PIPE

The Henco PE-Xc/AL/PE-Xc multilayer pipe must be equipped with insulating material supplied by the manufacturer to protect the pipe against:


- ✓ condensation
- ✓ heat loss
- ✓ expansion
- ✓ flow noise

It is also advised to insulate the pipes where they are grouped at high temperatures (underfloor heating effect).

The PE-foam has an extruded PE-film coloured red or blue providing the necessary protection. The insulating material is CFG-free and has the following technical specifications:

Quality standard	UNI EN ISO 9002-94
Lambda value	0,040 W/mK bij + 40°C
Fire classification	1 - UNI 9177 en UNI 8457
Temperature stability	-35°C tot + 95°C
Thickness (round)	6,10 of 13 mm

TYPE: ISO PRE-INSULATED (COIL)

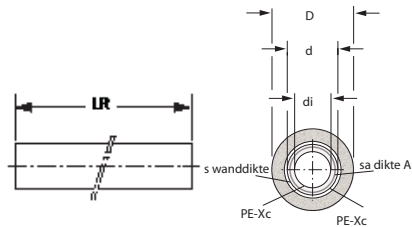

Coils: 6 mm insulation – blue or red						
d	di	D	s	sa	LR	Packing m/ pallet
mm	mm	mm	mm	mm		
14	10	26	2	0,4	100 m	100/1300 m
16	12	28	2	0,4	100 m	100/1300 m
18	14	30	2	0,4	50 m	50/650 m
20	16	32	2	0,4	50 m	50/700 m
26	20	38	3	0,5	25-50 m	50/500 m
32	26	44	3	0,7	25 m	25/225 m

Coils: 10 mm insulation – blue or red						
d	di	D	s	sa	LR	Packing m/ pallet
mm	mm	mm	mm	mm		
14	10	34	2	0,4	50 m	50/600 m
16	12	36	2	0,4	50 m	50/650 m
18	14	38	2	0,4	50 m	50/650 m
20	16	40	2	0,4	50 m	50/500 m
26	20	46	3	0,5	25 m	25/275 m

Coils: 13 mm insulation – blue						
d	di	D	s	sa	LR	Packing m/ pallet
mm	mm	mm	mm	mm		
16	12	42	2	0,4	50 m	50/400 m
20	16	46	2	0,4	50 m	50/400 m
26	20	52	3	0,5	50 m	50/400 m