



On Behalf of
Thermoflux d.o.o.

Product Name:	HEAT PUMP
Trademark:	ThermoFLUX
Model:	TF19DC, TF10DC, TF13DC, TF17DC, TF26DC, TF32DC, TF10DC SPLIT, TF17DC SPLIT, TF19DC SPLIT, TF10DC-B, TF12DC-B, TF16DC-B, TF20DC-B, TF22DC-B, TF14BT, TF23BT, TF10DC/HKMB03, TF-VV-72(HC)
Prepared For:	Thermoflux d.o.o.
Address	Bage 3, 70101 Jajce, Bosnia and Herzegovina
Prepared By:	Shenzhen SiCT Technology Co., Ltd.
Address	202, Building 3, No.111 Huanguan Middle Road, Songyuanxia Community, Guanhu Street, Longhua District, Shenzhen, Guangdong, China
Test Date:	June 16-25, 2022
Date of Report:	June 25, 2022
Report No.:	XK2205013071S

TEST REPORT IEC/EN 60335-2-40 Safety of household and similar electrical appliances - Part 2: Particular requirements for electric heat pumps, air-conditioners and dehumidifiers	
Report Number	XK2205013071S
Tested by (name + signature)	Rachel Yang
Reviewed by (name + signature) ..	Jean Shu
Approved by (name + signature) ..	Andy Wang
	
Testing Laboratory Name	Shenzhen SiCT Technology Co., Ltd.
Address	202, Building 3, No.111 Huanguan Middle Road, Songyuanxia Community, Guanhu Street, Longhua District, Shenzhen, Guangdong, China
Testing location	Shenzhen SiCT Technology Co., Ltd.
Applicant's Name	Thermoflux d.o.o.
Address	Bage 3, 70101 Jajce, Bosnia and Herzegovina
Test specification	
Standard	EN 60335-1:2012+A11:2014+A13:2017+A1:2019+A14:2019+A2:2019+A15:2021
Test procedure	EN 60335-2-40:2003+A13:2012
Test procedure	Type test
Procedure deviation	N/A
Non-standard test method	N/A
Test Report Form	
Test Report Form No.	EN60335_2_40F
Master TRF	Dated 2019-10
Test Report Form(s) Originator	SiCT
Test item description	HEAT PUMP
Trademark	ThermoFLUX
Model and/or type reference	TF19DC, TF10DC, TF13DC, TF17DC, TF26DC, TF32DC, TF10DC SPLIT, TF17DC SPLIT, TF19DC SPLIT, TF10DC-B, TF12DC-B, TF16DC-B, TF20DC-B, TF22DC-B, TF14BT, TF23BT, TF10DC/HKMB03, TF-VV-72(HC)
Rating(s)	Input: AC 220-240V & AC 380-420V, 50/60Hz, 4.21kW Max

General remarks

This report shall not be reproduced except in full without the written approval of the testing laboratory.

The test results presented in this report relate only to the item(s) tested.

"(see remark #)" refers to a remark appended to the report.

"(see Annex #)" refers to an annex appended to the report.

Clause numbers between brackets refer to clauses in

EN 60335-1:2012+A11:2014+A13:2017+A1:2019+A14:2019+A2:2019+A15:2021 and

EN 60335-2-40:2003+A13:2012

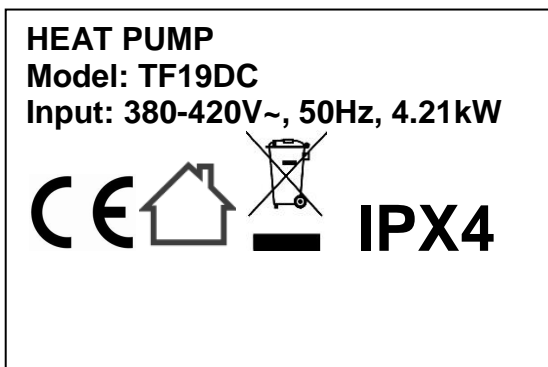
Throughout this report a comma is used as the decimal separator.



Brief description of the test sample:

The equipment is an HEAT PUMP For Home Use use for indoor only.

The test data is based on the model: TF19DC, Except the model number is different. The additional models are same in the constructions, shape of enclosures and electronics circuits as the basic model: TF19DC.

Copy of marking plate:



ThermoFLUX  	
DC Inverter toplinska pumpa - Monoblok	
Model	TF19DC
Kapacitet grijanja Min./Max. Heating capacity Min./Max.	8.56/18.6W
Potrošnja el. energije - grijanje Min./Max. Heating input power Min./Max.	1.55/4.21kW
Kapacitet hlađenja Min./Max. Cooling capacity Min./Max.	6.03/13.11kW
Potrošnja el. energije - hlađenje Min./Max. Cooling input power Min./Max.	1.67/5.26kW
Napajanje Power supply	380V-420V/50Hz
Otpornost na udarce i vanjske uticaje Shockproof grade	I
Vodootpornost Waterproof level	IPX4
Prosječna potrošnja Rated input power	4.21kW
Prosječna jačina struje Rated input current	8.9A
Max. tep. polaznog voda u režimu grijanja Max. water outlet temperature	55°C
Protok Water flow	3.2m ³ /h
Rashladno sredstvo/težina Refrigerant/Weight	R410A/3200g
Dozvoljeni pad pritiska Water pressure drop	25kPa
Polazni/povratni vod Water Pipe Connection	1"
Maksimalan pritisak vode Max. water pressure	10 bar
Težina Net weight	124kg
Datum proizvodnje Date	Pogledati barcode
Serijski broj Serial number	Pogledati barcode

EN 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdic
5	GENERAL CONDITIONS FOR THE TESTS		--
	Tests performed according to clause 5, e.g. nature of supply, sequence of testing, etc.		P
5.2	Tests of clause 21 carried out on separate samples. Tests of clauses 11, 19 and 21 require pressure measurements made at various points in refrigerating system (IEC 60335-2-40/A1)		P
	At least one additional specially prepared sample required for tests of annex FF (Leak simulation tests) (IEC 60335-2-40/A1)		N/A
	Temperatures on refrigerant piping measured during test of clause 11 (IEC 60335-2-40/A1)		P
5.6	Appropriate controls rendered inoperative during test (IEC 60335-2-40)		P
5.7	Tests of clauses 10 and 11 carried out under most severe operating conditions within operating temperature range specified by manufacturer. Annex AA provide examples of such temperature conditions (IEC 60335-2-40)		P
5.10	For split-package units, refrigerant lines installed in accordance with installation instructions (IEC 60335-2-40)		N/A
	Refrigerant line length is maximum length stated in installation instructions or (IEC 60335-2-40)		N/A
	7,5 m, whichever is shorter (IEC 60335-2-40)		N/A
	Thermal insulation of refrigerant lines applied in accordance with installation instructions (IEC 60335-2-40)		N/A
5.101	Motor-compressor subjected to relevant test of clause 19 of IEC 60335-2-34, unless (IEC 60335-2-40)		N/A
	motor-compressor comply with that standard (IEC 60335-2-40)	Approved compressor	P
5.102	Motor-compressors tested and comply with IEC 60335-2-34 need not additionally tested for clause 21 (IEC 60335-2-40/A1)		P
6	CLASSIFICATION		
6.1	Protection against electric shock: Class I, II, III (IEC 60335-2-40)	Class I	P
6.2	Protection against harmful ingress of water, IP degree in accordance with IEC 60529 (IEC 60335-2-40)		-

EN 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	- appliances or parts intended for outdoor use be at least IPX4 (EN 60335-2-40);		N/A
	- appliances intended only for indoor use (excluding laundry rooms) be IPX0 (EN 60335-2-40);	IPX4	P
	- appliances intended to be used in laundry rooms be at least IPX1 (EN 60335-2-40).		N/A
6.101	Degree of accessibility (accessible/not accessible to the general public) (EN 60335-2-40)	Accessible to the general public	P
7	MARKING AND INSTRUCTIONS		-
7.1	Rated voltage or voltage range (V)	See rating labels	P
	Symbol for nature of supply including number of phases, unless for single phase operation (EN 60335-2-40)	~	N/A
	Rated frequency (Hz)	50/60Hz	P
	Rated power input (W), or	See rating labels	P
	Rated current (A)		N/A
	Manufacturer's or responsible vendor's name, trademark or identification mark.....	N/A	P
	Model or type reference.....	See rating labels	P
	Symbol IEC 60417-5172, for class II appliances		N/A
	IP number, other than IPX0	IPX4	P
	Symbol IEC 60417-5180, for class III appliances, unless		N/A
	the appliance is operated by batteries only		N/A
	Symbol IEC 60417-5036, for the enclosure of electrically-operated water valves in external hose-sets for connection of an appliance to the water mains, if the working voltage exceeds extra-low voltage		N/A
	Mass of refrigerant or of each refrigerant in blend (except for azeotropic type) (EN 60335-2-40)	See rating labels	P
	Refrigerant identification (EN 60335-2-40)		P
	Permissible excessive operating pressure for sanitary hot water heat pumps (EN 60335-2-40) ..		N/A
	Maximum operating pressure for heat exchanger for hydronic fan coil/air handling units (EN 60335-2-40/A2)		N/A

EN 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	Permissible excessive operating pressure of refrigerant circuit for suction and discharge, if they differ (EN 60335-2-40).....:	4,0MPa	P
	Symbol for degree of protection against ingress of water, other than IPX0 (EN 60335-2-40).....:		N/A
	Separate marking of appliances with all rated characteristics of supplementary heaters (EN 60335-2-40)	No supplementary heaters used.	N/A
	Marking of direction of fluid flow (EN 60335-2-40)		N/A
	Flame symbol and instruction manual symbol of 7.6 visible when flammable refrigerant employed and following conditions exist (EN 60335-2-40/A1):		-
	- accessing parts expected to be subjected to maintenance or repair (EN 60335-2-40/A1);		N/A
	- observing appliance under sale or installed conditions (EN 60335-2-40/A1);		N/A
	- observing appliance packaging, if appliance charged with refrigerant (EN 60335-2-40/A1).		N/A
	If flammable refrigerant used, symbols for "read operator's manual", "operator's manual; operating instructions" and "service indicator; read technical manual" (symbols 0790, 1641 and 1659 of ISO 7000) placed on appliance in location visible to persons required to know information. Perpendicular height be at least 10 mm (EN 60335-2-40/A1 corr.1)		N/A
	Additional warning symbol (flame symbol: B.3.2 of ISO 3864) placed on nameplate of unit near declaration of refrigerant type and charge information. Perpendicular height be at least 10 mm, and symbol need not be in colour (EN 60335-2-40/A1)		N/A
	Following warning also applied to appliance when flammable refrigerant employed. WARNING Appliance shall be installed, operated and stored in a room with a floor area larger than 'X' m ² (only applies to appliances that are not fixed appliances) (EN 60335-2-40/A1)		N/A

EN 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	Not fixed appliances, minimum room size X specified on appliance. X in marking determined in m ² by procedure described in paragraph 2 of annex GG for unventilated areas and X in marking be 4 if refrigerant charge of appliance is less than m ₁ (see annex GG, paragraph 1.1) (EN 60335-2-40/A1)		N/A
	Maximum allowable pressure for low-pressure side and high-pressure side marked on product (EN 60335-2-40/A1)		N/A
	If not already visible when accessing service port and if service port provided, service port marked to identify type of refrigerant. If refrigerant is flammable, symbol B.3.2 of ISO 3864, be included, without specifying the colour (EN 60335-2-40/A1)		N/A
7.2	Warning for stationary appliances for multiple supply		N/A
	Warning placed in vicinity of terminal cover		N/A
7.3	Range of rated values marked with the lower and upper limits separated by a hyphen		P
	Different rated values marked with the values separated by an oblique stroke		N/A
7.4	Appliances adjustable for different rated voltages, the voltage setting is clearly discernible		N/A
	Requirement met if frequent changes are not required and the rated voltage to which the appliance is to be adjusted is determined from a wiring diagram		N/A
7.5	Appliances with more than one rated voltage or one or more rated voltage ranges, marked with rated input or rated current for each rated voltage or range, unless		N/A
	the power input is related to the arithmetic mean value of the rated voltage range		P
	Relation between marking for upper and lower limits of rated power input or rated current and voltage is clear		N/A
7.6	Correct symbols used		P
	Flammable refrigerant, warning symbol B.3.2 of ISO 3864, including colour and format, permanently placed on appliance. Perpendicular height of triangle containing "Caution, risk of fire" symbol be at least 30 mm (EN 60335-2-40/A1)		N/A

EN 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	Flammable refrigerant, warning symbol B.3.2 of ISO 3864, including colour and format, permanently placed on appliance. Perpendicular height of triangle containing "Caution, risk of fire" symbol be at least 30 mm (EN 60335-2-40/A1)		N/A
	Flammable refrigerant, symbol requiring reference to manual [0790 of ISO 7000], including colour and format, permanently placed on appliance (EN 60335-2-40/A1 corr.1)		N/A
	Symbol for nature of supply placed next to rated voltage		P
	Symbol for class II appliances placed unlikely to be confused with other marking		N/A
	Units of physical quantities and their symbols according to international standardized system		P
7.7	Connection diagram fixed to appliances to be connected to more than two supply conductors and appliances for multiple supply, unless		N/A
	correct mode of connection is obvious		-
7.8	Except for type Z attachment, terminals for connection to the supply mains indicated as follows:		-
	- marking of terminals exclusively for the neutral conductor (letter N)		P
	- marking of protective earthing terminals (symbol IEC 60417-5019)		P
	- marking not placed on removable parts		P
7.9	Marking or placing of switches which may cause a hazard		N/A
7.10	Indications of switches on stationary appliances and controls on all appliances by use of figures, letters or other visual means.....:	By use of figures, letters and other visual means	P
	This applies also to switches which are part of a control		N/A
	If figures are used, the off position indicated by the figure 0		N/A
	The figure 0 indicates only OFF position, unless no confusion with the OFF position		N/A
7.11	Indication for direction of adjustment of controls		P
7.12	Instructions for safe use provided		P

EN 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict

	Details concerning precautions during user maintenance		P
	Appliances not accessible to general public, classification of clause 6.101 included (IEC 60335-2-40)		N/A
	Appliances using flammable refrigerants, an installation, service and operation manual, either separate or combined manuals, provided and include information given in annex DD (IEC 60335-2-40/A1)		N/A
	The instructions state that:		-
	- the appliance is not to be used by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction	Refer to attachment no.2	N/A
	- children being supervised not to play with the appliance	Refer to attachment no.2	N/A
	For a part of class III construction supplied from a detachable power supply unit, the instructions state that the appliance is only to be used with the unit provided		N/A
	Instructions for class III appliances state that it must only be supplied at SELV, unless		N/A
	it is a battery-operated appliance, the battery being charged outside the appliance		N/A
7.12.1	Sufficient details for installation supplied		--
	For an appliance intended to be permanently connected to the water mains and not connected by a hose-set, this is stated		N/A
	Sufficient details for installation or maintenance supplied (IEC 60335-2-40):		-
	- that the appliance shall be installed in accordance with national wiring regulations (IEC 60335-2-40);		P
	- the dimensions of the space necessary for correct installation of the appliance including the minimum permissible distance to adjacent structures (IEC 60335-2-40);		P
	- for appliances with supplementary heaters, the minimum clearance from the appliance to combustible surfaces (IEC 60335-2-40);	No supplementary heater used	N/A

EN 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	- a wiring diagram with a clear indication of the connections and wiring to external control devices and supply cord (IEC 60335-2-40);		P
	- the range of external static pressures at which the appliance was tested (add-on heat pumps and appliances with supplementary heaters only) (IEC 60335-2-40);		N/A
	- the method of connection to the appliance to the electrical supply and interconnection of separate components (IEC 60335-2-40);		N/A
	- indication of which parts of the appliance are suitable for outdoor use, if applicable (IEC 60335-2-40);		N/A
	- details of type and rating of fuses (IEC 60335-2-40);		P
	- details of supplementary heating elements that may be used in conjunction with the appliance, including fitting instructions either with the appliance or with the supplementary heater (IEC 60335-2-40);		N/A
	- maximum and minimum water or brine operating temperatures (IEC 60335-2-40);		N/A
	- maximum and minimum water or brine operating pressures (IEC 60335-2-40).		N/A
	Open storage tanks of heat pumps for water heating, accompanied by an instruction sheet which state that the vent shall not be obstructed (IEC 60335-2-40)		N/A
7.12.2	Stationary appliances not fitted with means for disconnection from the supply mains having a contact separation in all poles that provide full disconnection under overvoltage category III, the instructions state that means for disconnection must be incorporated in the fixed wiring in accordance with the wiring rules		N/A
7.12.3	Insulation of the fixed wiring in contact with parts exceeding 50 K during clause 11; instructions state that the fixed wiring must be protected		N/A
7.12.4	Instructions for built-in appliances:		-
	- dimensions of space		N/A
	- dimensions and position of supporting and fixing		N/A
	- minimum distances between parts and surrounding structure		N/A

EN 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	- minimum dimensions of ventilating openings and arrangement		N/A
	- connection to supply mains and interconnection of separate components		N/A
	- allow disconnection of the appliance after installation, by accessible plug or a switch in the fixed wiring, unless		N/A
	a switch complying with 24.3		N/A
7.12.5	Replacement cord instructions, type X attachment with a specially prepared cord		N/A
	Replacement cord instructions, type Y attachment		P
	Replacement cord instructions, type Z attachment		N/A
7.12.6	Caution in the instructions for appliances incorporating a non-self-resetting thermal cut-out that is reset by disconnection of the supply mains, if this cut-out is required to comply with the standard		N/A
7.12.7	Instructions for fixed appliances stating how the appliance is to be fixed		N/A
7.12.8	Instructions for appliances connected to the water mains:		-
	- max. inlet water pressure (Pa):		N/A
	- min. inlet water pressure, if necessary (Pa):		N/A
	Instructions concerning new and old hose-sets for appliances connected to the water mains by detachable hose-sets		N/A
7.13	Instructions and other texts in an official language	English	P
7.14	Marking clearly legible and durable, rubbing test as specified		P
7.15	Markings on a main part		P
	Marking clearly discernible from the outside, if necessary after removal of a cover		P
	For portable appliances, cover can be removed or opened without a tool		P
	For stationary appliances, name, trademark or identification mark and model or type reference visible after installation		N/A
	For fixed appliances, name, trademark or identification mark and model or type reference visible after installation according to the instructions		N/A

EN 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	Indications for switches and controls placed on or near the components. Marking not on parts which can be positioned or repositioned in such a way that the marking is misleading		N/A
	Marking on panel allowed, provided panel in place for intended operation of appliance (IEC 60335-2-40)		N/A
7.16	Marking of a possible replaceable thermal link or fuse link clearly visible with regard to replacing the link		P
7.101	Marking of fuses and overload protective devices, if replaceable (IEC 60335-2-40):		-
	- fuse rated current in amperes, type and rated voltage or (IEC 60335-2-40)		P
	- manufacturer and model of overload protective device (IEC 60335-2-40)		N/A
7.102	Marking for connection with aluminium wire, if necessary (IEC 60335-2-40)		N/A
8	PROTECTION AGAINST ACCESS TO LIVE PARTS		-
8.1	Adequate protection against accidental contact with live parts		P
8.1.1	Requirement applies for all positions, detachable parts removed		P
	Lamps behind a detachable cover not removed, if conditions met		N/A
	Insertion or removal of lamps, protection against contact with live parts of the lamp cap		N/A
	Use of test probe B of IEC 61032, with a force not exceeding 1 N: no contact with live parts		P
	Use of test probe B of IEC 61032 through openings, with a force of 20 N: no contact with live parts		P
8.1.2	Use of test probe 13 of IEC 61032, with a force not exceeding 1 N, through openings in class 0 appliances and class II appliances/constructions: no contact with live parts		P
	Test probe 13 also applied through openings in earthed metal enclosures having a non-conductive coating: no contact with live parts		P
8.1.3	For appliances other than class II, use of test probe 41 of IEC 61032, with a force not exceeding 1 N: no contact with live parts of visible glowing heating elements	No visible glowing heating elements used.	N/A

EN 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
8.1.4	Accessible part not considered live if:		-
	- safety extra-low a.c. voltage: peak value not exceeding 42,4 V		N/A
	- safety extra-low d.c. voltage: not exceeding 42,4 V		N/A
	- or separated from live parts by protective impedance		N/A
	If protective impedance: d.c. current not exceeding 2 mA, and		N/A
	a.c. peak value not exceeding 0,7 mA		N/A
	- for peak values over 42,4 V up to and including 450 V, capacitance not exceeding 0,1 μ F		N/A
	- for peak values over 450 V up to and including 15 kV, discharge not exceeding 45 μ C		N/A
	- for peak values over 15kV, the energy in the discharge not exceeding 350 mJ		N/A
8.1.5	Live parts protected at least by basic insulation before installation or assembly:		-
	- built-in appliances		N/A
	- fixed appliances		N/A
	- appliances delivered in separate units		N/A
8.2	Class II appliances and constructions constructed so that there is adequate protection against accidental contact with basic insulation and metal parts separated from live parts by basic insulation only	Class II construction	P
	Only possible to touch parts separated from live parts by double or reinforced insulation		P
9	STARTING OF MOTOR-OPERATED APPLIANCES		-
	Requirements and tests are specified in part 2 when necessary		N/A
10	POWER INPUT AND CURRENT		-
10.1	Power input at normal operating temperature, rated voltage and normal operation not deviating from rated power input by more than shown in table 1.:	(see appended table)	P
	Test carried out at upper and lower limits of the ranges for appliances with one or more rated voltage ranges, unless		N/A
	the rated power input is related to the arithmetic mean value		P

EN 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
10.2	Current at normal operating temperature, rated voltage and normal operation not deviating from rated current by more than shown in table 2		N/A
	Test carried out at upper and lower limits of the ranges for appliances with one or more rated voltage ranges, unless		N/A
	the rated current is related to the arithmetic mean value of the range		N/A
11	HEATING		-
11.1	No excessive temperatures in normal use (IEC 60335-2-40)		P
	Compliance is checked by the tests of annex C, if (IEC 60335-2-40):		-
	- temperature of motor winding exceeds values shown in table 3 (IEC 60335-2-40)		N/A
	- there is doubt about classification of insulation system of the motor (IEC 60335-2-40)		N/A
11.2	Placing and mounting of appliance (IEC/EN 60335-2-40):		-
	- clearances to adjacent surfaces (IEC 60335-2-40);		P
	- flow rates for liquid source or sink equipment be minimum, except for fan coils where flow rates and liquid temperatures be maximum (IEC 60335-2-40/A2);	Not for liquid source or sink equipment.	N/A
	- static pressures (IEC 60335-2-40);		N/A
	- means of adjusting the flow, flow for tests be minimum obtainable (IEC 60335-2-40);		P
	- adjustable limit controls set at maximum cut-out setting and minimum differential (IEC 60335-2-40).		N/A
	Appliances with supplementary heaters, use test casing of clause 11.9 (IEC 60335-2-40)	No supplementary heater used.	N/A
11.2.1	Appliances with supplementary heaters, inlet duct connected to inlet air opening (IEC 60335-2-40)	No supplementary heater used.	N/A
11.2.2	Appliance without supplementary heaters, air outlet used (IEC 60335-2-40)		N/A
11.3	Temperature rise determine by thermocouples or resistance method (IEC 60335-2-40)	Resistance method: fan motor and transformer Thermocouples method: other parts	P
11.4	Test performed at supply voltage between 0,94 and 1,06 times the rated voltage (IEC 60335-2-40)	206,8V and 254,4V	P

EN 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	Heating elements energized at voltage which gives an electrical input of 1,15 times maximum rated power input (IEC 60335-2-40)		N/A
11.5	Test conducted in heating mode and cooling mode, if both exist (IEC 60335-2-40)	Dehumidifying mode only	N/A
	All supplementary heating elements operative simultaneously (IEC 60335-2-40)		N/A
11.6	Defrost test in most unfavourable conditions, if needed (IEC/EN 60335-2-40)		N/A
11.7	Appliances operated continuously until steady conditions except for defrost tests (IEC 60335-2-40)		P
11.8	Temperatures not exceeding values of table 3 (IEC 60335-2-40/A2)	(See appended tables)	P
	Protective devices do not operate (IEC 60335-2-40)		P
	Sealing compound not flowing out (IEC 60335-2-40)		P
	Temperature of air in outlet duct not exceed 90 °C (IEC 60335-2-40)		P
11.9	Test casing and installation of appliances in accordance with manufacturer's instructions (IEC 60335-2-40)		N/A
	Glass fibre insulation for appliances without indication of minimum clearances according to manufacturer; thermocouple in contact with enclosure (IEC 60335-2-40)		N/A
13	LEAKAGE CURRENT AND ELECTRIC STRENGTH AT OPERATING TEMPERATURE		-
13.1	Leakage current not excessive and electric strength adequate		P
	Heating appliances operated at 1,15 times the rated power input (W).....:		N/A
	Motor-operated appliances and combined appliances supplied at 1,06 times the rated voltage (V).....:	254,4V~	P
	Protective impedance and radio interference filters disconnected before carrying out the tests		N/A
13.2	For class 0, class II and class III appliances, leakage current measured by means of the circuit described in figure 4 of IEC 60990		N/A
	For other appliances, a low impedance ammeter may be used		P

EN 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	Leakage current measurements: (EN 60335-2-40)	(see appended table)	P
13.3	The appliance is disconnected from the supply		P
	Electric strength tests according to table 4.....: (see appended table)		P
	No breakdown during the tests		P
14	TRANSIENT OVERVOLTAGES		-
	Appliances withstand the transient over-voltages to which they may be subjected		P
	Clearances having a value less than specified in table 16 subjected to an impulse voltage test, the test voltage specified in table 6.....: (see appended table)		N/A
	No flashover during the test, unless		N/A
	of functional insulation if the appliance complies with clause 19 with the clearance short-circuited		N/A
15	MOISTURE RESISTANCE		-
15.1	Enclosure provides degree of moisture protection against ingress of water (rain, overflow from drain pan or defrosting), tests of clause 15.2, 15.3, 11.6 and 16) (EN 60335-2-40)		P
	Motor-compressor not operated and detachable parts removed during tests of clause 15.2 and 15.3 (EN 60335-2-40/A2)		P
15.2	Tests in accordance with IEC 60529 in appliances other than IPX0, as specified (EN 60335-2-40) ...:	IPX4	P
15.3	Drain pan filled to brim and subjected to continuous overflow and fan(s) switched on (EN 60335-2-40)		P
15.101	Spillage test as specified (EN 60335-2-40/A2)		P
	After spillage completed, appliance withstand test of clause 16 (EN 60335-2-40/A2)		P
16	LEAKAGE CURRENT AND ELECTRIC STRENGTH		-
16.1	Leakage current not excessive and electric strength adequate		P
	Protective impedance disconnected from live parts before carrying out the tests		N/A
	Tests carried out at room temperature and not connected to the supply		P
16.2	Single-phase appliances: test voltage 1,06 times rated voltage (V).....: (see appended table)	445.2 V~	P

EN 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	Three-phase appliances: test voltage 1,06 times rated voltage divided by $\sqrt{3}$ (V)		N/A
	Leakage current measurements (IEC 60335-2-40)	(see appended table)	P
	Limit values doubled if:		-
	- all controls have an off position in all poles, or		N/A
	- the appliance has no control other than a thermal cut-out, or		N/A
	- all thermostats, temperature limiters and energy regulators do not have an off position, or		N/A
	- the appliance has radio interference filters		N/A
	With the radio interference filters disconnected, the leakage current do not exceed limits specified.....	(see appended table)	P
16.3	Electric strength tests according to table 7.....	(see appended table)	P
	Test voltage applied between the supply cord and inlet bushing and cord guard and cord anchorage as specified.....		N/A
	No breakdown during the tests		P
17	OVERLOAD PROTECTION OF TRANSFORMERS AND ASSOCIATED CIRCUITS		-
	No excessive temperatures in transformer or associated circuits in event of short-circuits likely to occur in normal use.....	(see appended table)	P
	Appliance supplied with 1,06 or 0,94 times rated voltage under the most unfavourable short-circuit or overload likely to occur in normal use (V)	445.2 V~	P
	Basic insulation is not short-circuited		P
	Temperature rise of insulation of the conductors of safety extra-low voltage circuits not exceeding the relevant value specified in table 3 by more than 15 K		N/A
	Temperature of the winding not exceeding the value specified in table 8		P
	However, limits do not apply to fail-safe transformers complying with sub-clause 15.5 of IEC 61558-1		N/A
18	ENDURANCE		-
	Requirements and tests are specified in part 2 when necessary		N/A
19	ABNORMAL OPERATION		-

EN 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
19.1	The risk of fire or mechanical damage under abnormal or careless operation obviated (tests 19.2-19.14) (IEC 60335-2-40)		P
	Failure of transfer medium flow or of any control device not result in a hazard (IEC 60335-2-40)		P
	Electronic circuits so designed and applied that a fault will not render the appliance unsafe (electric shock, fire or mechanical hazard, dangerous malfunction) (test 19.11 and 19.12) (IEC 60335-2-40)		P
19.2	Test of appliance with motor rotors, other than motor-compressors, operated for 15 days (360 h) or until protection device opens circuit (IEC 60335-2-40)		P
	Insulation of motor windings (IEC 60335-2-40)	(See appended table)	P
	Temperature of enclosure does not exceed (C) (IEC 60335-2-40)	(See appended table)	P
	Temperature of the windings does not exceed the values shown in the table ; temperature (C) (IEC 60335-2-40)	(See appended table)	P
	Electric strength test as specified in 16.3, 72 h after the beginning of the test (IEC 60335-2-40)		P
	30 mA residual current device does not open (IEC 60335-2-40)		P
	At the end, leakage current between windings and enclosure does not exceed 2 mA (IEC 60335-2-40)		P
19.3	Motor-compressor complies with IEC 60335-2-34 (IEC 60335-2-40)		P
	Test of motor-compressor with rotor locked as specified in clause 19.101 of IEC 60335-2-34 and comply with 19.104 of that standard (IEC 60335-2-40)	(See appended table)	N/A
19.4	Test of three-phase motors operated under conditions of clause 11 with one phase disconnected until steady conditions or protective device operates (IEC 60335-2-40)		N/A
19.5	Test of appliance with heat transfer medium flow of the outdoor heat exchanger restricted or shut off when reaching steady conditions (IEC 60335-2-40)	(See appended table)	P
	Test of appliance with heat transfer flow of the indoor heat exchanger restricted or shut off when reaching steady conditions (IEC 60335-2-40)		P

EN 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	Disconnection of motor common to both the outdoor and the indoor heat exchangers when reaching steady conditions (EN 60335-2-40)		P
19.6	Test of appliances using water as heat transfer medium (EN 60335-2-40)		N/A
19.7	Test of air to air appliances at rated voltage or at the upper limit of the rated voltage range. Dry-bulb temperature is 5 K below values specified by manufacturer (EN 60335-2-40)		P
	Test with the dry-bulb temperature 10 K over the values specified by manufacturer (EN 60335-2-40)		P
19.8	Test of appliances with supplementary heaters (EN 60335-2-40)		N/A
19.9	Test at temperature permitting continuous operation of the motor-compressor and electric heating elements at same time (EN 60335-2-40)		N/A
19.10	Test of appliance with any defect which expected during normal use (EN 60335-2-40)	(see appended table)	P
19.10.101	Test of clause 19.10 repeated on class II appliances and class I appliances incorporating tubular sheathed or embedded heating elements (EN 60335-2-40/A2)		N/A
	However, controls not short-circuited but one end of element connected to sheath of heating element (EN 60335-2-40/A2)		N/A
	Test repeated with polarity of supply to appliance reversed and with other end of element connected to sheath (EN 60335-2-40/A2)		N/A
	Test not carried out on appliances intended to permanently connected to fixed wiring and on appliances where an all-pole disconnection occurs during test of clause 19.10 (EN 60335-2-40/A2)		N/A
19.11	Electronic circuits, compliance checked by evaluation of the fault conditions specified in clause 19.11.2 for all circuits or parts of circuits (EN 60335-2-40), unless		P
	they comply with conditions specified in clause 19.11.1 (EN 60335-2-40)		N/A
	Windings temperature not exceeding values shown in table 8 (EN 60335-2-40)		P
	Appliance comply with conditions of clause 19.14 (EN 60335-2-40)		P

EN 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	Appliance withstands test: a conductor becomes open circuited and three conditions are met (EN 60335-2-40)		P
19.11.1	Before applying the fault conditions a) to f) in 19.11.2, it is checked if circuits or parts of circuit meet both of following conditions (EN 60335-2-40):		-
	- electronic circuit is low-power circuit, that is, maximum power at low-power points not exceed 15 W according to tests specified (EN 60335-2-40)		N/A
	- protection against electric shock, fire hazard, mechanical hazard or dangerous malfunction in other parts of appliance does not rely on correct functioning of electronic circuit (EN 60335-2-40)		P
19.11.2	Fault conditions applied one at a time, appliance operated under conditions specified in clause 11, but supplied at rated voltage, duration of tests as specified (EN 60335-2-40):		-
	a) short circuit of creepage distances and clearances between live parts of different potential, if these distances less than values specified in clause 29.1, unless relevant part is adequately encapsulated (EN 60335-2-40)	(see appended table)	P
	b) open circuit at terminals of any component (EN 60335-2-40)	(see appended table)	P
	c) short circuit if capacitors, unless they comply with IEC 60384-14 (EN 60335-2-40)	(see appended table)	P
	d) short circuit of any two terminals of an electronic component, other than integrated circuits. This fault condition not applied between circuits of an optocoupler (EN 60335-2-40)	(see appended table)	P
	e) failure of triacs in diode mode (EN 60335-2-40)	(see appended table)	N/A
	f) failure of an integrated circuit. Possible hazardous situations of appliance assessed to ensure that safety not rely on correct functioning of such component (EN 60335-2-40)	(see appended table)	P
	Short-circuit of low-power circuits (EN 60335-2-40)		N/A
	Duration of tests (EN 60335-2-40):		-
	- as specified in clause 11.7 but only for one operating cycle, if fault cannot recognised by user (EN 60335-2-40);		P
	- as specified in clause 19.2, if fault can recognised by user (EN 60335-2-40);		P

EN 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	- until steady conditions established (IEC 60335-2-40).		P
	Test ended if interruption of supply occurs within the appliance (IEC 60335-2-40)		P
	If electronic circuit operates to ensure compliance with clause 19, relevant test repeated with single fault a) to f) simulated (IEC 60335-2-40)		P
	Fault condition f) applied to encapsulated or similar components (IEC 60335-2-40)		P
	PTC's, NTC's and VDR's resistors not short-circuited if used as specified by manufacturer (IEC 60335-2-40)		P
19.12	If safety of appliance for any of fault conditions specified in clause 19.11.2 depends on operation of miniature fuse-link complying with IEC 60127, test repeated with fuse-link replaced by an ammeter (IEC 60335-2-40)		P
	Current 2,1 times rated current of fuse-link, circuit not adequately protected (fuse-link short-circuited) (IEC 60335-2-40)		N/A
	Current \blacklozenge 2,75 times rated current of fuse-link, circuit adequately protected (IEC 60335-2-40)		P
	Current \blacklozenge 2,1 and 2,75 times rated current, fuse-link short-circuited and test carried out during specified time (IEC 60335-2-40)		N/A
19.13	Appliances with PTC heating elements test as specified (IEC 60335-2-40)		N/A
19.14	During tests of clause 19.2 to 19.10.101 and 19.11, 19.12 and 19.13 if appropriate, appliances not emit flames, molten metal, poisonous or ignitable gas in hazardous amounts (IEC 60335-2-40/A2)		P
	Enclosures not deform (IEC 60335-2-40)		P
	Temperature rise not exceed values shown in table 9 (IEC 60335-2-40)	(See appended table)	P
	Electric strength test, test voltage as specified in table 4 (IEC 60335-2-40)		P
19.15	For appliances with a mains voltage selector switch, the switch is set to the lowest rated voltage position and the highest value of rated voltage is applied		N/A

EN 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	If doubt, supplementary or reinforced insulation subjected to the electric strength test of 16.3		N/A
	If necessary, repetition of groups of three blows on a new sample		N/A
	Safety requirements specified in annex EE applied. Pressure test in annex EE applies to parts other than pressure vessels (IEC 60335-2-40/A1)		P
	Safety requirements of ISO 5149 applied (IEC 60335-2-40/A2)		P
21.2	Accessible parts of solid insulation having strength to prevent penetration by sharp implements		P
	Test not applicable if the thickness of supplementary insulation is at least 1 mm and reinforced insulation at least 2 mm		P
	The insulation is tested as specified, and does withstand the electric strength test of 16.3		N/A
22	CONSTRUCTION		-
22.1	Appliance marked with the first numeral of the IP system, relevant requirements of IEC 60529 are fulfilled	IPX4	P
22.2	Stationary appliance: means to ensure all-pole disconnection from the supply being provided:		-
	- a supply cord fitted with a plug, or		N/A
	- a switch complying with 24.3, or		N/A
	- a statement in the instruction sheet that a disconnection incorporated in the fixed wiring is to be provided, or		N/A
	- an appliance inlet		N/A
	Single-pole switches and single-pole protective devices for the disconnection of heating elements in single-phase, permanently connected class 01 and class I appliances, connected to the phase conductor		N/A
22.3	Appliance provided with pins: no undue strain on socket-outlets		N/A
	Applied torque not exceeding 0,25 Nm		N/A
	Pull force of 50 N to each pin after the appliance has being placed in the heating cabinet; when cooled to room temperature the pins are not displaced by more than 1 mm		N/A

EN 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	Each pin subjected to a torque of 0,4 Nm; the pins are not rotating, unless		N/A
	rotating does not impair compliance with this standard		N/A
22.4	Appliance for heating liquids and appliance causing undue vibration not provided with pins for insertion into socket-outlets		N/A
22.5	No risk of electric shock when touching the pins of the plug, for appliances having a capacitor with rated capacitance exceeding 0,1 F, the appliance being disconnected from the supply at the instant of voltage peak		P
	Voltage not exceeding 34 V (V)	5,0V	P
22.6	Electrical insulation not affected by condensing water or leaking liquid		P
	Electrical insulation of class II appliances not affected if a hose ruptures or seal leaks		N/A
	In case of doubt, test as described		N/A
	Electrical insulation not affected by snow penetration to appliance enclosure (IEC 60335-2-40)	The appliance intends to be for indoor use only.	N/A
22.7	Adequate safeguards against the risk of excessive pressure in appliances containing liquid or gases or having steam-producing devices		N/A
22.8	Electrical connections not subject to pulling during cleaning of compartments to which access can be gained without the aid of a tool, and that are likely to be cleaned in normal use		P
22.9	Insulation, internal wiring, windings, commutators and slip rings not exposed to oil, grease or similar substances, unless		N/A
	the substance has adequate insulating properties		P
22.10	Not possible to reset voltage-maintained non-self-resetting thermal cut-outs by the operation of an automatic switching device incorporated within the appliance, if:		N/A
	- a non-self-resetting thermal cut-out is required by the standard, and		N/A
	- a voltage maintained non-self-resetting thermal cut-out is used to meet it		N/A
	Non-self-resetting thermal motor protectors have a trip-free action, unless		N/A

EN 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	Each pin subjected to a torque of 0,4 Nm; the pins are not rotating, unless		N/A
	rotating does not impair compliance with this standard		N/A
22.4	Appliance for heating liquids and appliance causing undue vibration not provided with pins for insertion into socket-outlets		N/A
22.5	No risk of electric shock when touching the pins of the plug, for appliances having a capacitor with rated capacitance exceeding 0,1 F, the appliance being disconnected from the supply at the instant of voltage peak		P
	Voltage not exceeding 34 V (V)	5,0V	P
22.6	Electrical insulation not affected by condensing water or leaking liquid		P
	Electrical insulation of class II appliances not affected if a hose ruptures or seal leaks		N/A
	In case of doubt, test as described		N/A
	Electrical insulation not affected by snow penetration to appliance enclosure (IEC 60335-2-40)	The appliance intends to be for indoor use only.	N/A
22.7	Adequate safeguards against the risk of excessive pressure in appliances containing liquid or gases or having steam-producing devices		N/A
22.8	Electrical connections not subject to pulling during cleaning of compartments to which access can be gained without the aid of a tool, and that are likely to be cleaned in normal use		P
22.9	Insulation, internal wiring, windings, commutators and slip rings not exposed to oil, grease or similar substances, unless		N/A
	the substance has adequate insulating properties		P
22.10	Not possible to reset voltage-maintained non-self-resetting thermal cut-outs by the operation of an automatic switching device incorporated within the appliance, if:		N/A
	- a non-self-resetting thermal cut-out is required by the standard, and		N/A
	- a voltage maintained non-self-resetting thermal cut-out is used to meet it		N/A
	Non-self-resetting thermal motor protectors have a trip-free action, unless		N/A

EN 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict

	they are voltage maintained		N/A
	Reset buttons of non-self-resetting controls so located or protected that accidental resetting is unlikely		N/A
22.11	Reliable fixing of non-detachable parts that provide the necessary degree of protection against electric shock, moisture or contact with moving parts		P
	Obvious locked position of snap-in devices used for fixing such parts		P
	No deterioration of the fixing properties of snap-in devices used in parts that are likely to be removed during installation or servicing		P
	Tests as described		P
22.12	Handles, knobs etc. fixed in a reliable manner		P
	Fixing in wrong position of handles, knobs etc. indicating position of switches or similar components not possible		N/A
	Axial force 15 N applied to parts, the shape being so that an axial pull is unlikely to be applied		N/A
	Axial force 30 N applied to parts, the shape being so that an axial pull is likely to be applied		P
22.13	Unlikely that handles, when gripped as in normal use, make the operator's hand touch parts having a temperature rise exceeding the value specified for handles which are held for short periods only		P
22.14	No ragged or sharp edges creating a hazard for the user in normal use, or during user maintenance		P
	No exposed pointed ends of self-tapping screws or other fasteners, likely to be touched by the user in normal use or during user maintenance		P
22.15	Storage hooks and the like for flexible cords smooth and well rounded		N/A
22.16	Automatic cord reels cause no undue abrasion or damage to the sheath of the flexible cord, no breakage of conductors strands and no undue wear of contacts		N/A
	Cord reel tested with 6000 operations, as specified		N/A
	Electric strength test of 16.3, voltage of 1000 V applied		N/A
22.17	Spacers not removable from the outside by hand or by means of a screwdriver or a spanner		N/A

EN 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
22.18	Current-carrying parts and other metal parts resistant to corrosion		P
22.19	Driving belts not relied upon to provide the required level of insulation, unless		N/A
	constructed to prevent inappropriate replacement		N/A
22.20	Direct contact between live parts and thermal insulation effectively prevented, unless		N/A
	material used is non-corrosive, non-hygroscopic and non-combustible		N/A
22.21	Wood, cotton, silk, ordinary paper and fibrous or hygroscopic material not used as insulation, unless		P
	impregnated		N/A
	This requirement does not apply to magnesium oxide and mineral ceramic fibres used for the electrical insulation of heating elements		N/A
22.22	Appliances not containing asbestos		P
22.23	Oils containing polychlorinated biphenyl (PCB) not used		P
22.24	Bare heating elements adequately supported to prevent contact with accessible metal parts in case of rupture or sagging (IEC 60335-2-40)		N/A
	Bare heating elements only used with metal enclosures (wood or composite enclosures not allowed) (IEC 60335-2-40)		N/A
22.25	Sagging heating conductors, except in class III appliances or class III constructions that do not contain live parts, cannot come into contact with accessible metal parts		N/A
22.26	For class III constructions the insulation between parts operating at safety extra-low voltage and other live parts complies with the requirements for double or reinforced insulation		N/A
22.27	Parts connected by protective impedance separated by double or reinforced insulation		N/A
22.28	Metal parts of class II appliances conductively connected to gas pipes or in contact with water, separated from live parts by double or reinforced insulation		N/A
22.29	Class II appliances permanently connected to fixed wiring so constructed that the required degree of access to live parts is maintained after installation	Class I appliance	N/A

EN 60335-2-40			
Clause	Requirement + Test	Result – Remark	Verdict
22.30	Parts serving as supplementary or reinforced insulation fixed so that they cannot be removed without being seriously damaged, or		P
	so constructed that they cannot be replaced in an incorrect position, and so that if they are omitted, the appliance is rendered inoperable or manifestly incomplete		P
22.31	Neither clearances nor creepage distances over supplementary and reinforced insulation reduced below values specified in clause 29 as a result of wear		P
	Neither clearances nor creepage distances between live parts and accessible parts reduced below values for supplementary insulation if wires, screws etc. become loose		P
22.32	Supplementary and reinforced insulation constructed or protected against pollution so that clearances or creepage distances are not reduced below the values in clause 29		P
	Supplementary insulation of natural or synthetic rubber resistant to ageing, or arranged and dimensioned so that creepage distances are not reduced below values specified in 29.2		N/A
	Ceramic material not tightly sintered, similar materials or beads alone not used as supplementary or reinforced insulation		N/A
	Insulating material in which heating conductors are embedded is considered to be basic insulation, not reinforced insulation		N/A
	Oxygen bomb test at 70 °C for 96 h and 16 h at room temperature		N/A
22.33	Conductive liquids that are or may become accessible in normal use and conductive liquids that are in contact with unearthed accessible metal parts are not in direct contact with live parts		P
	Electrodes not used for heating liquids		N/A
	For class II constructions, conductive liquids that are or may become accessible in normal use and conductive liquids that are in contact with unearthed accessible metal parts, not in direct contact with basic or reinforced insulation, unless		N/A
	the reinforced insulation consists of at least 3 layers		N/A

EN 60335-2-40			
Clause	Requirement + Test	Result – Remark	Verdict
	For class II constructions, conductive liquids which are in contact with live parts, not in direct contact with reinforced insulation, unless		N/A
	the reinforced insulation consists of at least 3 layers		N/A
	An air layer not used as basic or supplementary insulation in a double insulation system if likely to be bridged by leaking liquid		N/A
22.34	Shafts of operating knobs, handles, levers etc. not live, unless		P
	the shaft is not accessible when the part is removed		N/A
22.35	For other than class III constructions, handles, levers and knobs, held or actuated in normal use, not becoming live in the event of a failure of basic insulation		P
	Such parts being of metal, and their shafts or fixings are likely to become live in the event of a failure of basic insulation, are either adequately covered by insulation material or their accessible parts are separated from their shafts or fixings by supplementary insulation		N/A
	This requirement does not apply to handles, levers and knobs on stationary appliances, other than those of electrical components, provided they are reliably connected to an earthing terminal or earthing contact, or separated from live parts by earthed metal		N/A
	Insulating material covering metal handles, levers and knobs withstand the electric strength test of 16.3 for supplementary insulation		N/A
22.36	For appliances other than class III, handles continuously held in the hand in normal use so constructed that when gripped as in normal use, the operators hand is not likely to touch metal parts, unless		N/A
	they are separated from live parts by double or reinforced insulation		N/A
22.37	Capacitors in class II appliances not connected to accessible metal parts and their casings, if of metal, separated from accessible metal parts by supplementary insulation, unless		N/A
	the capacitors comply with 22.42		N/A

EN 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
22.38	Capacitors not connected between the contacts of a thermal cut-out		P
22.39	Lamp holders used only for the connection of lamps		N/A
22.40	Motor-operated appliances and combined appliances intended to be moved while in operation, or having accessible moving parts, fitted with a switch to control the motor. The actuating member of the switch being easily visible and accessible		N/A
	If the appliance cannot operate continuously, automatically or remotely without giving rise to a hazard, appliances for remote operation being fitted with a switch for stopping the operation. The actuating member of the switch being easily visible and accessible		N/A
22.41	No components, other than lamps, containing mercury		P
22.42	Protective impedance consisting of at least two separate components		N/A
	Values specified in 8.1.4 not exceeded if any one of the components are short-circuited or open-circuited		N/A
	Resistors checked by the test of 14.1 a) in IEC 60065		N/A
	Capacitors checked by the tests for class Y capacitors in IEC 60384-14		N/A
22.43	Appliances adjustable for different voltages, accidental changing of the setting of the voltage unlikely to occur		N/A
22.44	Appliances not having an enclosure that is shaped or decorated like a toy		P
22.45	When air is used as reinforced insulation, clearances not reduced below the values specified in 29.1.3 due to deformation as a result of an external force applied to the enclosure		P
22.46	For programmable protective electronic circuits used to ensure compliance with the standard, the software contains measures to control the fault/error conditions in table R.1		N/A
	Software that contains measures to control the fault/error conditions specified in table R.2 is to be specified in parts 2 for particular constructions or to address specific hazards		N/A

EN 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	These requirements are not applicable to software used for functional purpose or compliance with clause 11		N/A
22.47	Appliances connected to the water mains withstand the water pressure expected in normal use	Not connected to the water mains	N/A
	No leakage from any part, including any inlet water hose		N/A
22.48	Appliances connected to the water mains constructed to prevent backsiphonage of non-potable water	Not direct connected to water mains	N/A
22.49	For remote operation, the duration of operation is to be set before the appliance can be started, unless		N/A
	the appliance switches off automatically or can operate continuously without hazard		N/A
22.50	Controls incorporated in the appliance take priority over controls actuated by remote operation		N/A
22.51	There is a control on the appliance manually adjusted to the setting for remote operation before the appliance can be operated in this mode		N/A
	There is a visual indication showing that the appliance is adjusted for remote operation		N/A
	These requirements not necessary on appliances that can operate as follows, without giving rise to a hazard:		-
	- continuously, or		N/A
	- automatically, or		N/A
	- remotely		N/A
22.52	Socket-outlets on appliances accessible to the user in accordance with the socket-outlet system used in the country in which the appliance is sold		N/A
22.101	Appliances intended to be fixed, securely fixed (IEC 60335-2-40)		N/A
22.102.1	At least two thermal cut-outs in appliances with supplementary heating elements for air (first one be self-resetting and other non-self-resetting thermal cut-out) (IEC 60335-2-40/A2)		N/A
22.102.2	Appliances provided with supplementary heaters for water incorporate non-self-resetting thermal cut-out, providing all-pole disconnection that operates separately from water thermostats (IEC 60335-2-40/A2)		N/A

EN 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	However, for appliances intended to be connected to fixed wiring, the neutral conductor need not be disconnected (IEC 60335-2-40/A2)		N/A
22.102.3	Thermal cut-outs of capillary type open in event of leakage from capillary tube (IEC 60335-2-40/A2)		N/A
22.103	Non-self-resetting cut-outs independent of other control devices (IEC 60335-2-40)		N/A
22.104	Containers of sanitary hot water heat pumps withstand twice permissible operating pressure in closed containers (IEC 60335-2-40) or		N/A
	0,15 MPa in open containers (IEC 60335-2-40)		N/A
	without leakage or rupture (IEC 60335-2-40)		N/A
22.105	Air or vapour cushion in closed containers not exceeding 10 % (IEC 60335-2-40)		N/A
22.106	Pressure relief devices operating at 0,1 MPa over permissible operating pressure (IEC 60335-2-40)		N/A
22.107	Water outlet systems of open containers free from obstruction causing over-pressure (IEC 60335-2-40)		N/A
	Vented containers of sanitary hot water heat pumps always open to the atmosphere through appropriate aperture (IEC 60335-2-40)		N/A
22.108	Not vented open containers subjected to test in accordance with clause 22.104 to vacuum of 33 kPa for 15 min (IEC 60335-2-40)		N/A
	Container show no deformation which result in a hazard (IEC 60335-2-40)		N/A
22.109	Replacement of non-self-resetting thermal cut-outs does not damage other connections (IEC 60335-2-40)	Not for replacement	N/A
22.110	Non-self-resetting thermal cut-outs operate without short-circuiting live parts of different potential and without causing contact between live parts and enclosure (IEC 60335-2-40)		N/A
	Test repeated five times without blowing 3 A fuse which connects appliance to earth (IEC 60335-2-40)		N/A
	Electric strength test as specified in clause 16.3 for supplementary heating elements (IEC 60335-2-40)		N/A
22.111	Manual resetting of thermostats not necessary after power supply interruption (IEC 60335-2-40)		N/A

EN 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
22.112	Construction of refrigerating system comply with requirements of Section 3 of ISO 5149 (EN 60335-2-40/A1)		P
22.113	Flammable refrigerant used, refrigerant tubing protected or enclosed to avoid mechanical damage (EN 60335-2-40/A1)		N/A
	Tubing protected to extent that it will not be handled or used for carrying during moving of product (EN 60335-2-40/A1)		N/A
	Tubing located within confines of cabinet considered to be protected from mechanical damage (EN 60335-2-40/A1)		N/A
22.114	Flammable refrigerant used, low temperature solder alloys, such as lead/tin alloys, not acceptable for pipe connections (EN 60335-2-40/A1)		N/A
22.115	Total refrigerant mass (M) of all refrigerating systems within appliance employing flammable refrigerants, not exceed m_3 defined in annex GG (EN 60335-2-40/A1)		N/A
22.116	Appliances using flammable refrigerants constructed that any leaked refrigerant not flow or stagnate so as to cause fire or explosion hazard in areas within appliance where electrical components, which could be a source of ignition and which could function under normal conditions or in event of leak, fitted (EN 60335-2-40/A1)		N/A
	Separate components, such as thermostats, which charged with less than 0,5 g of flammable gas not considered to cause fire or explosion hazard in event of leakage of gas within component itself (EN 60335-2-40/A1)		N/A
	All electrical components that could be a source of ignition and which could function under normal conditions or in the event of a leak, comply with one of the following (EN 60335-2-40/A1):		-
	- IEC 60079-15:2001, Cl. 9 to 26, for group IIA gases or the refrigerant used or an applicable standard that makes electrical components suitable for use in Zone 2, 1 or 0 as defined in IEC 60079-14 (EN 60335-2-40/A1)		N/A
	- Not be located in an area where a potentially flammable gas mixture will accumulate as demonstrated by the test of annex FF (EN 60335-2-40/A1)		N/A

EN 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	- Be located in an enclosure. The enclosure containing the electrical components comply with IEC 60079-15:2001 for enclosures suitable for use with group IIA gases or the refrigerant used (IEC 60335-2-40/A1)		N/A
22.117	Temperatures on surfaces that exposed to leakage of flammable refrigerants not exceed auto-ignition temperature of refrigerant reduced by 100 K; some typical values given in annex BB (IEC 60335-2-40/A1)		N/A
22.118	Flammable refrigerant used, all appliances charged with refrigerant at manufacturing location or charged on site as recommended by manufacturer (IEC 60335-2-40/A1)		N/A
	Part of appliance that charged on site, which requires brazing or welding in installation not shipped with flammable refrigerant charge. Joints made in installation between parts of refrigerating system, with at least one part charged, made in accordance with following (IEC 60335-2-40/A1):		-
	- A brazed, welded, or mechanical connection shall be made before opening the valves to permit refrigerant to flow between the refrigerating system parts. A vacuum valve shall be provided to evacuate the interconnecting pipe and/or any uncharged refrigerating system part (IEC 60335-2-40/A1)		N/A
	- Reusable mechanical connectors and flared joints are not allowed indoors (IEC 60335-2-40/A1)		N/A
	- Refrigerant tubing shall be protected or enclosed to avoid damage (IEC 60335-2-40/A1)		N/A
	Flexible refrigerant connectors (such as connecting lines between the indoor and outdoor unit) that may be displaced during normal operations shall be protected against mechanical damage (IEC 60335-2-40/A1)		N/A
23	INTERNAL WIRING		-
23.1	Wireways smooth and free from sharp edges		P
	Wires protected against contact with burrs, cooling fins etc.		P
	Wire holes in metal well-rounded or provided with bushings		N/A
	Wiring effectively prevented from coming into contact with moving parts		P

EN 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
23.2	Beads etc. on live wires cannot change their position, and are not resting on sharp edges		N/A
	Beads inside flexible metal conduits contained within an insulating sleeve		N/A
23.3	Electrical connections and internal conductors movable relatively to each other not exposed to undue stress		P
	Flexible metallic tubes not causing damage to insulation of conductors		N/A
	Open-coil springs not used		N/A
	Adequate insulating lining provided inside a coiled spring, the turns of which touch one another		N/A
	No damage after 10 000 flexings for conductors flexed during normal use, or		N/A
	100 flexings for conductors flexed during user maintenance		N/A
	Electric strength test of 16.3, 1000 V between live parts and accessible metal parts		N/A
	Not more than 10 % of the strands of any conductor broken, and		N/A
	not more than 30 % for wiring supplying circuits that consume no more than 15 W		N/A
23.4	Bare internal wiring sufficiently rigid and fixed		N/A
23.5	The insulation of internal wiring subjected to the supply mains voltage withstanding the electrical stress likely to occur in normal use		P
	Basic insulation electrically equivalent to the basic insulation of cords complying with IEC 60227 or IEC 60245, or		P
	no breakdown when a voltage of 2000 V is applied for 15 min between the conductor and metal foil wrapped around the insulation		P
23.6	Sleeving used as supplementary insulation on internal wiring retained in position by clamping at both ends, or		P
	be such that it can only be removed by breaking or cutting		P
23.7	The colour combination green/yellow only used for earthing conductors		P
23.8	Aluminium wires not used for internal wiring		P

EN 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
23.9	Stranded conductors not consolidated by soldering where they are subjected to contact pressure, unless		P
	the contact pressure is provided by spring terminals		N/A
23.10	The insulation and sheath of internal wiring, incorporated in external hoses for the connection of an appliance to the water mains, at least equivalent to that of light polyvinyl chloride sheathed flexible cord (60227 IEC 52)		N/A
24	COMPONENTS		-
24.1	Components comply with safety requirements in relevant IEC standards		P
	List of components	(see appended table)	P
	If components have not been tested and found to comply with relevant IEC standard for the number of cycles specified, they are tested in accordance with 24.1.1 to 24.1.9		N/A
	For components mentioned in 24.1.1 to 24.1.9 no additional tests specified in the relevant component standard are necessary other than those specified in 24.1.1 to 24.1.9		P
	Components not tested and found to comply with relevant IEC standard and components not marked or not used in accordance with its marking, tested under the conditions occurring in the appliance		P
	Lampholders and starterholders that have not being tested and found to comply with the relevant IEC standard, tested as a part of the appliance and additionally according to the gauging and interchangeability requirements of the relevant IEC standard		N/A
	No additional tests specified for nationally standardized plugs such as those detailed in IEC/TR 60083 or connectors complying with the standard sheets of IEC 60320-1 and IEC 60309		N/A
	Motor-compressors not tested according to IEC 60335-2-34 (not necessary to meet all requirements of IEC 60335-2-34) (IEC 60335-2-40)		N/A
24.1.1	Capacitors likely to be permanently subjected to the supply voltage and used for radio interference suppression or for voltage dividing, complying with IEC 60384-14		P

EN 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	If the capacitors have to be tested, they are tested according to annex F		N/A
24.1.2	Safety isolating transformers complying with IEC 61558-2-6		N/A
	If they have to be tested, they are tested according to annex G		N/A
24.1.3	Switches complying with IEC 61058-1, the number of cycles of operation being at least 10 000		N/A
	If they have to be tested, they are tested according to annex H		N/A
	If the switch operates a relay or contactor, the complete switching system is subjected to the test		N/A
	If the switch only operates a motor starting relay complying with IEC 60730-2-10 with the number of cycles of a least 10 000 as specified, the complete switching system need not be tested		N/A
24.1.4	Automatic controls complying with IEC 60730-1 with the relevant part 2. The number of cycles of operation being at least:		-
	- thermostats:..... 10 000		N/A
	- temperature limiters 1 000		N/A
	- self-resetting thermal cut-outs 300		N/A
	- voltage maintained non-self-resetting thermal cut-outs 1 000		N/A
	- other non-self-resetting thermal cut-outs 30		N/A
	- timers: 3 000		N/A
	- energy regulators: 10 000		N/A
	- thermostats which control motor-compressor (IEC/EN 60335-2-40):..... 100 000		N/A
	- motor-compressor starting relays (IEC/EN 60335-2-40):..... 100 000		N/A
	- automatic thermal motor-protectors for hermetic and semi-hermetic type motor-compressors (not less than number of operations during locked rotor test) (IEC/EN 60335-2-40):..... min 2000	Approved	P
	- manual reset thermal motor-protectors for hermetic and semi-hermetic type motor-compressors (IEC/EN 60335-2-40):..... 50		N/A
	- other automatic thermal motor-protectors (IEC/EN 60335-2-40):..... 2000	Approved	P

EN 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	- other manual reset thermal motor-protectors (IEC/EN 60335-2-40):.....30		N/A
	The number of cycles for controls operating during clause 11 need not be declared, if the appliance meets the requirements of this standard when they are short-circuited		N/A
	Thermal motor protectors are tested in combination with their motor under the conditions specified in annex D		N/A
	For water valves containing live parts and that are incorporated in external hoses for connection of an appliance to the water mains, the degree of protection declared for subclause 6.5.2 of IEC 60730-2-8 is IPX7		N/A
24.1.5	Appliance couplers complying with IEC 60320-1		N/A
	However, for appliances classified higher than IPX0, the appliance couplers complying with IEC 60320-2-3		N/A
	Interconnection couplers complying with IEC 60320-2-2		N/A
24.1.6	Small lamp holders similar to E10 lampholders complying with IEC 60238, the requirements for E10 lampholders being applicable		N/A
24.1.7	For remote operation of the appliance via a telecommunication network, the relevant standard for the telecommunication interface circuitry in the appliance is IEC 62151		N/A
24.1.8	The relevant standard for thermal links is IEC 60691		P
	Thermal links not complying with IEC 60691 are considered to be an intentionally weak part for the purposes of clause 19		N/A
24.1.9	Contactors and relays, other than motor starting relays, tested as part of the appliance		P
	They are also tested in accordance with clause 17 of IEC 60730-1, the number of cycles of operations in 24.1.4 selected according to the contactor or relay function in the appliance	Cycles: 100000	P
24.2	Appliances not fitted with:		-
	- switches or automatic controls in flexible cords		P

EN 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	- devices causing the protective device in the fixed wiring to operate in the event of a fault in the appliance		P
	- thermal cut-outs that can be reset by soldering, unless		N/A
	the solder has a melting point of at least 230 °C		N/A
24.3	Switches intended for all-pole disconnection of stationary appliances are directly connected to the supply terminals and have a contact separation in all poles, providing full disconnection under overvoltage category III conditions		N/A
24.4	Plugs and socket-outlets for extra-low voltage circuits and heating elements, not interchangeable with plugs and socket-outlets listed in IEC/TR 60083 or IEC 60906-1 or with connectors and appliance inlets complying with the standard sheets of IEC 60320-1		N/A
24.5	Capacitors in auxiliary windings of motors marked with their rated voltage and capacitance, and used accordingly		P
	Voltage across capacitors in series with a motor winding does not exceed 1,1 times rated voltage, when the appliance is supplied at 1,1 times rated voltage under minimum load	(see appended table)	P
24.6	Working voltage of motors connected to the supply mains and having basic insulation that is inadequate for the rated voltage of the appliance, not exceeding 42 V		N/A
	In addition, the motors comply with the requirements of annex I		N/A
24.7	Detachable hose-sets for connection of appliances to the water mains comply with IEC 61770		N/A
	They are supplied with the appliance		N/A
	Appliances intended to be permanently connected to the water mains not connected by a detachable hose-set		N/A
24.8	Motor running capacitors in appliances for which 30.2.3 is applicable and that are permanently connected in series with a motor winding, not causing a hazard in event of a failure		P
	One or more of the following conditions are to be met:		-
	- the capacitors are of class P2 according to IEC 60252-1		P

EN 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	- the capacitors are housed within a metallic or ceramic enclosure		N/A
	- the distance of separation of the outer surface to adjacent non-metallic parts exceeds 50 mm		N/A
	- adjacent non-metallic parts within 50 mm withstand the needle-flame test of annex E		N/A
	- adjacent non-metallic parts within 50 mm classified as at least V-1 according to IEC 60695-11-10		N/A
24.101	Replaceable parts of thermal control devices identified by marking (IEC 60335-2-40)		N/A
25	SUPPLY CONNECTION AND EXTERNAL FLEXIBLE CORDS		-
25.1	Appliance not intended for permanent connection to fixed wiring, means for connection to the supply:		-
	- supply cord fitted with a plug,		P
	- an appliance inlet having at least the same degree of protection against moisture as required for the appliance, or		N/A
	- pins for insertion into socket-outlets		N/A
	Supply cord fitted with plug provided, if (IEC 60335-2-40):		-
	- appliance only for indoor use (IEC 60335-2-40),		P
	- marked with rating of 25 A or less and (IEC 60335-2-40)		P
	- complies with code requirements of country where it will be used (IEC 60335-2-40).		P
	Appliance inlet not allowed (IEC 60335-2-40)		P
25.2	Appliance not provided with more than one means of connection to the supply mains		P
	Stationary appliance for multiple supply may be provided with more than one means of connection, provided electric strength test of 1250 V for 1 min between each means of connection causes no breakdown		N/A
25.3	Appliance intended to be permanently connected to fixed wiring provided with one of the following means for connection to the supply mains:		-
	- a set of terminals allowing the connection of a flexible cord		N/A
	- a fitted supply cord		N/A

EN 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	- a set of supply leads accommodated in a suitable compartment		N/A
	- a set of terminals for the connection of cables of fixed wiring, cross-sectional areas specified in 26.6, and the appliance allows the connection of the supply conductors after the appliance has been fixed to its support		N/A
	- a set of terminals and cable entries, conduit entries, knock-outs or glands, allowing connection of appropriate types of cable or conduit, and the appliance allows the connection of the supply conductors after the appliance has been fixed to its support		N/A
	For a fixed appliance constructed so that parts can be removed to facilitate easy installation, this requirement is met if it is possible to connect the fixed wiring without difficulty after a part of the appliance has been fixed to its support		N/A
25.4	Cable and conduit entries, rated current of appliance not exceeding 16 A, dimension according to table 10 (mm).....:		N/A
	Introduction of conduit or cable does not reduce clearances or creepage distances below values specified in clause 29		N/A
25.5	Method for assembling the supply cord to the appliance:		-
	- type X attachment		N/A
	- type Y attachment		P
	- type Z attachment, if allowed in relevant part 2		N/A
	Type X attachment, other than those with a specially prepared cord, not used for flat twin tinsel cords		N/A
	For multi-phase appliances supplied with a supply cord and that are intended to be permanently connected to fixed wiring, the supply cord is assembled to the appliance by type Y attachment		N/A
25.6	Plugs fitted with only one flexible cord		P
25.7	Supply cords, other than for class III appliances, being one of the following types:		-
	- rubber sheathed (at least 60245 IEC 53)		N/A
	- polychloroprene sheathed (at least 60245 IEC 57)		N/A
	- cross-linked polyvinyl chloride sheathed (at least 60245 IEC 88)		N/A

EN 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	- polyvinyl chloride sheathed. Not used if they are likely to touch metal parts having a temperature rise exceeding 75 K during the test of clause 11		-
	- light polyvinyl chloride sheathed cord (60227 IEC 52), for appliances not exceeding 3 kg		N/A
	- ordinary polyvinyl chloride sheathed cord (60227 IEC 53), for other appliances	H05VV-F	P
	- heat resistant polyvinyl chloride sheathed. Not used for type X attachment other than specially prepared cords		-
	- heat-resistant light polyvinyl chloride sheathed cord (60227 IEC 56), for appliances not exceeding 3 kg		N/A
	- heat-resistant polyvinyl chloride sheathed cord (60227 IEC 57), for other appliances		N/A
	Supply cords for class III appliances adequately insulated		N/A
	Test with 500 V for 2 min for supply cords of class III appliances that contain live parts		N/A
	Supply cords for outdoor use not lighter than polychloroprene sheathed flexible cord (60245 IEC 57) (IEC 60335-2-40)		N/A
25.8	Nominal cross-sectional area of supply cords not less than table 11; rated current (A); cross-sectional area (mm ²).....:	Measured current: 3,0A Cross-section area: 3G0,75mm ²	P
25.9	Supply cords not in contact with sharp points or edges		P
25.10	Supply cord of class I appliances have a green/yellow core for earthing		P
25.11	Conductors of supply cords not consolidated by soldering where they are subject to contact pressure, unless		P
	the contact pressure is provided by spring terminals		N/A
25.12	Insulation of the supply cord not damaged when moulding the cord to part of the enclosure		P
25.13	Inlet openings so constructed as to prevent damage to the supply cord		P
	If the enclosure at the inlet opening is not of insulating material, a non-detachable lining or bushing complying with 29.3 for supplementary insulation provided		N/A

EN 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	If unsheathed supply cord, a similar additional bushing or lining is required, unless the appliance is		N/A
	class 0, or		N/A
	a class III appliance not containing live parts		N/A
25.14	Supply cords moved while in operation adequately protected against excessive flexing		P
	Flexing test, as described:		-
	- applied force (N).....:	10	P
	- number of flexings.....:	10000	P
	The test does not result in:		-
	- short-circuit between the conductors, such that the current exceeds a value of twice the rated current		P
	- breakage of more than 10 % of the strands of any conductor		P
	- separation of the conductor from its terminal		P
	- loosening of any cord guard		P
	- damage to the cord or the cord guard	No damage	P
	- broken strands piercing the insulation and becoming accessible	No broken	P
25.15	For appliances with supply cord and appliances to be permanently connected to fixed wiring by a flexible cord, conductors of the supply cord relieved from strain, twisting and abrasion by use of cord anchorage		P
	The cord cannot be pushed into the appliance to such an extent that the cord or internal parts of the appliance can be damaged		P
	Pull and torque test of supply cord, values shown in table 12: mass (kg); pull (N); torque (not on automatic cord reel) (Nm).....:	100N; 0,35Nm	P
	Cord not damaged and max. 2 mm displacement of the cord		P
25.16	Cord anchorages for type X attachments constructed and located so that:		-
	- replacement of the cord is easily possible		N/A
	- it is clear how the relief from strain and the prevention of twisting are obtained		N/A
	- they are suitable for different types of supply cord		N/A

EN 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	- cord cannot touch the clamping screws of cord anchorage if these screws are accessible, unless		N/A
	they are separated from accessible metal parts by supplementary insulation		N/A
	- the cord is not clamped by a metal screw which bears directly on the cord		N/A
	- at least one part of the cord anchorage securely fixed to the appliance, unless		N/A
	it is part of a specially prepared cord		N/A
	- screws which have to be operated when replacing the cord do not fix any other component, unless		N/A
	the appliance becomes inoperative or incomplete or the parts cannot be removed without a tool		N/A
	- if labyrinths can be bypassed the test of 25.15 is nevertheless withstood		N/A
	- for class 0, 0I and I appliances they are of insulating material or are provided with an insulating lining, unless		N/A
	failure of the insulation of the cord does not make accessible metal parts live		N/A
	- for class II appliances they are of insulating material, or		N/A
	if of metal, they are insulated from accessible metal parts by supplementary insulation		N/A
	After the test of 25.15, under the conditions specified, the conductors have not moved by more than 1 mm in the terminals		N/A
25.17	Adequate cord anchorages for type Y and Z attachment, test with the cord supplied with the appliance		P
25.18	Cord anchorages only accessible with the aid of a tool, or		P
	Constructed so that the cord can only be fitted with the aid of a tool		N/A
25.19	Type X attachment, glands not used as cord anchorage in portable appliances		N/A
	Tying the cord into a knot or tying the cord with string not used		N/A

EN 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
25.20	The insulated conductors of the supply cord for type Y and Z attachment additionally insulated from accessible metal parts		P
25.21	Space for supply cord for type X attachment or for connection of fixed wiring constructed:		-
	- to permit checking of conductors with respect to correct positioning and connection before fitting any cover		N/A
	- so there is no risk of damage to the conductors or their insulation when fitting the cover		N/A
	- for portable appliances, so that the uninsulated end of a conductor, if it becomes free from the terminal, prevented from contact with accessible metal parts		P
	2 N test to the conductor for portable appliances; no contact with accessible metal parts		N/A
25.22	Appliance inlets:		-
	- live parts not accessible during insertion or removal		N/A
	Requirement not applicable to appliance inlets complying with IEC 60320-1		N/A
	- connector can be inserted without difficulty		N/A
	- the appliance is not supported by the connector		N/A
	- not for cold conditions if temp. rise of external metal parts exceeds 75 K during clause 11, unless		N/A
	the supply cord is unlikely to touch such metal parts		N/A
25.23	Interconnection cords comply with the requirements for the supply cord, except that:		N/A
	- the cross-sectional area of the conductors is determined on the basis of the maximum current during clause 11		N/A
	- the thickness of the insulation may be reduced		N/A
	If necessary, electric strength test of 16.3		N/A
25.24	Interconnection cords not detachable without the aid of a tool if compliance with this standard is impaired when they are disconnected		N/A
25.25	Dimensions of pins that are inserted into socket-outlets compatible with the dimensions of the relevant socket-outlet.		N/A

EN 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	Dimensions of pins and engagement face in accordance with the dimensions of the relevant plug in IEC/TR 60083		N/A
26	TERMINALS FOR EXTERNAL CONDUCTORS		-
26.1	Appliances provided with terminals or equally effective devices for connection of external conductors		P
	Terminals only accessible after removal of a non-detachable cover, except		P
	for class III appliances that do not contain live parts		N/A
	Earthing terminals may be accessible if a tool is required to make the connections and means are provided to clamp the wire independently from its connection		N/A
26.2	Appliances with type X attachment and appliances for the connection of cables to fixed wiring provided with terminals in which connections are made by means of screws, nuts or similar devices, unless		N/A
	the connections are soldered		N/A
	Screws and nuts not used to fix any other component, except		N/A
	internal conductors, if so arranged that they are unlikely to be displaced when fitting the supply conductors		N/A
	If soldered connections used, the conductor so positioned or fixed that reliance is not placed on soldering alone, unless		N/A
	barriers provided so that neither clearances nor creepage distances between live parts and other metal parts reduced below the values for supplementary insulation if the conductor becomes free at the soldered joint		N/A
26.3	Terminals for type X attachment and for connection of cables of fixed wiring so constructed that the conductor is clamped between metal surfaces with sufficient contact pressure but without damaging the conductor		N/A
	Terminals fixed so that when the clamping means is tightened or loosened:		-
	- the terminal does not become loose		N/A
	- internal wiring is not subjected to stress		N/A
	- neither clearances nor creepage distances are reduced below the values in clause 29		N/A

EN 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	Compliance checked by inspection and by the test of subclause 9.6 of IEC 60999-1, the torque applied being equal to two-thirds of the torque specified (Nm)		N/A
	No deep or sharp indentations of the conductors		N/A
26.4	Terminals for type X attachment, except those having a specially prepared cord and those for the connection of cables of fixed wiring, no special preparation of conductors such as by soldering, use of cable lugs, eyelets or similar, and		N/A
	so constructed or placed that conductors prevented from slipping out when clamping screws or nuts are tightened		N/A
26.5	Terminals for type X attachment so located or shielded that if a wire of a stranded conductor escapes, no risk of accidental connection to other parts that result in a hazard		N/A
	Stranded conductor test, 8 mm insulation removed		N/A
	No contact between live parts and accessible metal parts and,		N/A
	for class II constructions, between live parts and metal parts separated from accessible metal parts by supplementary insulation only		N/A
26.6	Terminals for type X attachment and for connection of cables of fixed wiring suitable for connection of conductors with cross-sectional area according to table 13; rated current (A); nominal cross-sectional area (mm ²).....		N/A
	If a specially prepared cord is used, terminals need only be suitable for that cord		N/A
26.7	Terminals for type X attachment, except in class III appliances not containing live parts, accessible after removal of a cover or part of the enclosure		N/A
26.8	Terminals for the connection of fixed wiring, including the earthing terminal, located close to each other		N/A
26.9	Terminals of the pillar type constructed and located as specified		N/A
26.10	Terminals with screw clamping and screwless terminals not used for flat twin tinsel cords, unless		P
	conductors ends fitted with means suitable for screw terminals		P

EN 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	Pull test of 5 N to the connection		P
26.11	For type Y and Z attachment, soldered, welded, crimped or similar connections may be used		P
	For class II appliances, the conductor so positioned or fixed that reliance is not placed on soldering, welding or crimping alone		N/A
	If soldering, welding or crimping alone used, barriers provided so that clearances and creepage distances between live parts and other metal parts are not reduced below the values for supplementary insulation if the conductor becomes free		N/A
27	PROVISION FOR EARTHING		-
27.1	Accessible metal parts of class 0I and I appliances permanently and reliably connected to an earthing terminal or earthing contact of the appliance inlet		P
	Earthing terminals and earthing contacts not connected to the neutral terminal		P
	Class 0, II and III appliances have no provision for earthing		N/A
	Safety extra-low voltage circuits not earthed, unless		N/A
	protective extra-low voltage circuits		N/A
27.2	Clamping means of earthing terminals adequately secured against accidental loosening		P
	Terminals for the connection of external equipotential bonding conductors allow connection of conductors of 2,5 to 6 mm ² , and		N/A
	do not provide earthing continuity between different parts of the appliance, and		N/A
	conductors cannot be loosened without the aid of a tool		N/A
27.3	For a detachable part having an earth connection and being plugged into another part of the appliance, the earth connection is made before and separated after current-carrying connections when removing the part		N/A
	For appliances with supply cords, current-carrying conductors become taut before earthing conductor, if the cord slips out of the cord anchorage		P
27.4	No risk of corrosion resulting from contact between parts of the earthing terminal and the copper of the earthing conductor or other metal		P

EN 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	Parts providing earthing continuity, other than parts of a metal frame or enclosure, have adequate resistance to corrosion		P
	If of steel, these parts provided with an electroplated coating with a thickness at least 5 µm		P
	Adequate protection against rusting of parts of coated or uncoated steel, only intended to provide or transmit contact pressure		P
	In the body of the earthing terminal is a part of a frame or enclosure of aluminium or aluminium alloys, precautions taken to avoid risk of corrosion		N/A
27.5	Low resistance of connection between earthing terminal and earthed metal parts		P
	This requirement does not apply to connections providing earthing continuity in the protective extra-low voltage circuit, provided the clearances of basic insulation are based on the rated voltage of the appliance		N/A
	Resistance not exceeding 0,1 at the specified low-resistance test ().....:	0,08	P
27.6	The printed conductors of printed circuit boards not used to provide earthing continuity in hand-held appliances.		N/A
	They may be used to provide earthing continuity in other appliances if at least two tracks are used with independent soldering points and the appliance complies with 27.5 for each circuit		N/A
28	SCREWS AND CONNECTIONS		-
28.1	Fixings, electrical connections and connections providing earthing continuity withstand mechanical stresses		P
	Screws not of soft metal liable to creep, such as zinc or aluminium		P
	Diameter of screws of insulating material min. 3 mm		N/A
	Screws of insulating material not used for any electrical connections or connections providing earthing continuity		N/A
	Screws used for electrical connections or connections providing earthing continuity screwed into metal		P

EN 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	Screws not of insulating material if their replacement by a metal screw can impair supplementary or reinforced insulation		P
	For type X attachment, screws to be removed for replacement of supply cord or for user maintenance, not of insulating material if their replacement by a metal screw impairs basic insulation		N/A
	For screws and nuts; torque-test as specified in table 14.....:	(see appended table)	P
28.2	Electrical connections and connections providing earthing continuity constructed so that contact pressure is not transmitted through non-ceramic insulating material liable to shrink or distort, unless		P
	there is resiliency in the metallic parts to compensate for shrinkage or distortion of the insulating material		P
	This requirement does not apply to electrical connections in circuits of appliances for which:		-
	- 30.2.2 is applicable and that carry a current not exceeding 0,5 A		N/A
	- 30.2.3 is applicable and that carry a current not exceeding 0,2 A		N/A
28.3	Space-threaded (sheet metal) screws only used for electrical connections if they clamp the parts together		N/A
	Thread-cutting (self-tapping) screws and thread rolling screws only used for electrical connections if they generate a full form standard machine screw thread		P
	Thread-cutting (self-tapping) screws not used if they are likely to be operated by the user or installer		N/A
	Thread-cutting, thread rolling and space threaded screws may be used in connections providing earthing continuity provided it is not necessary to disturb the connection:		-
	- in normal use,		P
	- during user maintenance,		P
	- when replacing a supply cord having a type X attachment, or		N/A
	- during installation		P

EN 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	At least two screws being used for each connection providing earthing continuity, unless		P
	the screw forms a thread having a length of at least half the diameter of the screw		P
28.4	Screws and nuts that make mechanical connection secured against loosening if they also make electrical connections or connections providing earthing continuity		P
	This requirement does not apply to screws in the earthing circuit if at least two screws are used, or		P
	if an alternative earthing circuit is provided		N/A
	Rivets for electrical connections or connections providing earthing continuity secured against loosening if the connections are subjected to torsion		N/A
29	CLEARANCES, CREEPAGE DISTANCES AND SOLID INSULATION		-
	Clearances, creepage distances and solid insulation withstand electrical stress		P
	For coatings used on printed circuits boards to protect the microenvironment (Type 1) or to provide basic insulation (Type 2), annex J applies.....:		N/A
	The microenvironment is pollution degree 1 under type 1 protection		N/A
	For type 2 protection, the spacing between the conductors before the protection is applied is not less than the values specified in Table 1 of IEC 60664-3		N/A
	These values apply to functional, basic, supplementary and reinforced insulation.....:		N/A
	For motor-compressor not complying with IEC 60335-2-34, additions and modifications as specified (EN 60335-2-40)		N/A
29.1	Clearances not less than the values specified in table 16, taking into account the rated impulse voltage for the overvoltage categories of table 15, unless	(see appended table)	P
	for basic insulation and functional insulation they comply with the impulse voltage test of clause 14		N/A

EN 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	However, if the distances are affected by wear, distortion, movement of the parts or during assembly, the clearances for rated impulse voltages of 1500 V and above are increased by 0,5 mm and the impulse voltage test is not applicable		N/A
	Impulse voltage test is not applicable:		-
	- when the microenvironment is pollution degree 3, or		P
	- for basic insulation of class 0 and class 01 appliances		N/A
	Appliances are in overvoltage category II		P
	A force of 2 N is applied to bare conductors, other than heating elements		P
	A force of 30 N is applied to accessible surfaces		P
29.1.1	Clearances of basic insulation withstand the overvoltages, taking into account the rated impulse voltage		P
	The values of table 16 or the impulse voltage test of clause 14 are applicable.....:	(see appended table)	P
	Clearance at the terminals of tubular sheathed heating elements may be reduced to 1,0 mm if the microenvironment is pollution degree 1		N/A
	Lacquered conductors of windings considered to be bare conductors		P
29.1.2	Clearances of supplementary insulation not less than those specified for basic insulation in table 16	(see appended table)	P
29.1.3	Clearances of reinforced insulation not less than those specified for basic insulation in table 16, using the next higher step for rated impulse voltage	(see appended table)	P
	For double insulation, with no intermediate conductive part between basic and supplementary insulation, clearances are measured between live parts and the accessible surface, and the insulation system is treated as reinforced insulation		P
29.1.4	Clearances for functional insulation are the largest values determined from:		-
	- table 16 based on the rated impulse voltage.....:	(see appended table)	P
	- table F.7a in IEC 60664-1, frequency not exceeding 30 kHz		P

EN 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	- clause 4 of IEC 60664-4, frequency exceeding 30 kHz		N/A
	If values of table 16 are largest, the impulse voltage test of clause 14 may be applied instead, unless		N/A
	the microenvironment is pollution degree 3, or		P
	the distances can be affected by wear, distortion, movement of the parts or during assembly		N/A
	However, clearances are not specified if the appliance complies with clause 19 with the functional insulation short-circuited		N/A
	Lacquered conductors of windings considered to be bare conductors		P
	However, clearances at crossover points are not measured		P
	Clearance between surfaces of PTC heating elements may be reduced to 1mm		N/A
29.1.5	Appliances having higher working voltages than rated voltage, clearances for basic insulation are the largest values determined from:		-
	- table 16 based on the rated impulse voltage.....:	(see appended table)	P
	- table F.7a in IEC 60664-1, frequency not exceeding 30 kHz		P
	- clause 4 of IEC 60664-4, frequency exceeding 30 kHz		N/A
	If clearances for basic insulation are selected from Table F.7a of IEC 60664-1 or clause 4 of IEC 60664-4, the clearances of supplementary insulation are not less than those specified for basic insulation		N/A
	If clearances for basic insulation are selected from Table F.7a of IEC 60664-1, the clearances of reinforced insulation dimensioned as specified in Table F.7a are to withstand 160% of the withstand voltage required for basic insulation		N/A
	If clearances for basic insulation are selected from clause 4 of IEC 60664-4, the clearances of reinforced insulation are twice the value required for basic insulation		N/A

EN 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	If the secondary winding of a step-down transformer is earthed, or if there is an earthed screen between the primary and secondary windings, clearances of basic insulation on the secondary side not less than those specified in table 16, but using the next lower step for rated impulse voltage		N/A
	Circuits supplied with a voltage lower than rated voltage, clearances of functional insulation are based on the working voltage used as the rated voltage in table 15		P
29.2	Creepage distances not less than those appropriate for the working voltage, taking into account the material group and the pollution degree.....:	(see appended table)	P
	Pollution degree 2 applies, unless		N/A
	- precautions taken to protect the insulation; pollution degree 1		N/A
	- insulation subjected to conductive pollution; pollution degree 3		P
	A force of 2 N is applied to bare conductors, other than heating elements		P
	A force of 30 N is applied to accessible surfaces		P
	In a double insulation system, the working voltage for both the basic and supplementary insulation is taken as the working voltage across the complete double insulation system		P
	Insulation located in airflow, pollution degree 3 unless (IEC 60335-2-40)		P
	insulation enclosed or located so that unlikely to be exposed to pollution due to normal use (IEC 60335-2-40)		P
29.2.1	Creepage distances of basic insulation not less than specified in table 17.....:	(see appended table)	P
	However, if the working voltage is periodic and has a frequency exceeding 30 kHz, the creepage distances are also determined from table 2 of IEC 60664-4, these values being used if exceeding the values in table 17		N/A
	Except for pollution degree 1, corresponding creepage distance not less than the minimum specified for the clearance in table 16, if the clearance has been checked according to the test of clause 14		N/A

EN 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
29.2.2	Creepage distances of supplementary insulation at least those specified for basic insulation in table 17, or	(see appended table)	P
	Table 2 of IEC 60664-4, as applicable		N/A
29.2.3	Creepage distances of reinforced insulation at least double those specified for basic insulation in table 17, or	(see appended table)	P
	Table 2 of IEC 60664-4, as applicable		N/A
29.2.4	Creepage distances of functional insulation not less than specified in table 18.....	(see appended table)	P
	However, if the working voltage is periodic and has a frequency exceeding 30 kHz, the creepage distances are also determined from table 2 of IEC 60664-4, these values being used if exceeding the values in table 18		N/A
	Creepage distances may be reduced if the appliance complies with clause 19 with the functional insulation short-circuited		N/A
29.3	Supplementary and reinforced insulation have adequate thickness, or a sufficient number of layers, to withstand the electrical stresses		P
	Compliance checked:		-
	- by measurement, in accordance with 29.3.1, or		P
	- by an electric strength test in accordance with 29.3.2, or		P
	- by an assessment of the thermal quality of the material combined with an electric strength test, in accordance with 29.3.3, and		N/A
	for accessible parts of reinforced insulation consisting of a single layer, by measurement in accordance with 29.3.4, or		N/A
	- as specified in subclause 6.3 of IEC 60664-4 for insulation that is subjected to any periodic voltage having a frequency exceeding 30 kHz		N/A
29.3.1	Supplementary insulation have a thickness of at least 1 mm		P
	Reinforced insulation have a thickness of at least 2 mm		P
29.3.2	Each layer of material withstand the electric strength test of 16.3 for supplementary insulation		P

EN 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	Supplementary insulation consist of at least 2 layers		P
	Reinforced insulation consist of at least 3 layers		N/A
29.3.3	The insulation is subjected to the dry heat test Bb of IEC 60068-2-2, followed by		N/A
	the electric strength test of 16.3		N/A
	If the temperature rise during the tests of clause 19 does not exceed the value specified in table 3, the test of IEC 60068-2-2 is not carried out		N/A
29.3.4	Thickness of accessible parts of reinforced insulation consisting of a single layer not less than specified in table 19.....:		N/A
30	RESISTANCE TO HEAT AND FIRE		-
30.1	External parts of non-metallic material,		-
	parts supporting live parts, and		P
	parts of thermoplastic material providing supplementary or reinforced insulation		P
	sufficiently resistant to heat		P
	Ball-pressure test according to IEC 60695-10-2		P
	External parts tested at 40 °C plus the maximum temperature rise determined during the test of clause 11, or at 75 °C, whichever is the higher; temperature (OC)	(see appended table)	P
	Parts supporting live parts tested at 40 °C plus the maximum temperature rise determined during the test of clause 11, or at 125 °C, whichever is the higher; temperature (OC).....:	(see appended table)	P
	Parts of thermoplastic material providing supplementary or reinforced insulation tested at 25 °C plus the maximum temperature rise determined during clause 19, if higher; temperature (OC)	(see appended table)	N/A
30.2	Parts of non-metallic material resistant to ignition and spread of fire		P
	This requirement does not apply to:		-
	parts having a mass not exceeding 0,5 g, provided the cumulative effect is unlikely to propagate flames that originate inside the appliance by propagating flames from one part to another, or		P

EN 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	decorative trims, knobs and other parts unlikely to be ignited or to propagate flames that originate inside the appliance		P
	Compliance checked by the test of 30.2.1, and in addition:		P
	- for attended appliances, 30.2.2 applies		N/A
	- for unattended appliances, 30.2.3 applies		P
	For appliances for remote operation, 30.2.3 applies		N/A
	For base material of printed circuit boards, 30.2.4 applies		P
30.2.1	Parts of non-metallic material subjected to the glow-wire test of IEC 60695-2-11 at 550 °C		P
	However, test not carried out if the material is classified as having a glow-wire flammability index according to IEC 60695-2-12 of at least 550 °C, or		N/A
	the material is classified at least HB40 according to IEC 60695-11-10		N/A
	Parts for which the glow-wire test cannot be carried out need to meet the requirements in ISO 9772 for material classified HBF		N/A
30.2.3	Appliances operated while unattended, tested as specified in 30.2.3.1 and 30.2.3.2		P
	The tests are not applicable to conditions as specified.....:	(see appended table)	P
30.2.3.1	Parts of non-metallic material supporting connections carrying a current exceeding 0,2 A during normal operation, and		P
	parts of non-metallic material, other than small parts, within a distance of 3 mm,		P
	subjected to the glow-wire test of IEC 60695-2-11 with a test severity of 850 °C		P
	Glow-wire applied to an interposed shielding material, if relevant		P
	The glow-wire test is not carried out on parts of material classified as having a glow-wire flammability index according to IEC 60695-2-12 of at least 850 °C		N/A
30.2.3.2	Parts of non-metallic material supporting connections, and		P

EN 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	parts of non-metallic material within a distance of 3 mm,		P
	subjected to glow-wire test of IEC 60695-2-11		P
	The test severity is:		-
	- 750 °C, for connections carrying a current exceeding 0,2 A during normal operation		P
	- 650 °C, for other connections		N/A
	Glow-wire applied to an interposed shielding material, if relevant		N/A
	However, the glow-wire test of 750 °C or 650 °C as appropriate, is not carried out on parts of material fulfilling both or either of the following classifications:		-
	- a glow-wire ignition temperature according to IEC 60695-2-13 of at least:		N/A
	- 775 °C, for connections carrying a current exceeding 0,2 A during normal operation		N/A
	- 675 °C, for other connections		N/A
	- a glow-wire flammability index according to IEC 60695-2-12 of at least:		N/A
	- 750 °C, for connections carrying a current exceeding 0,2 A during normal operation		N/A
	- 650 °C, for other connections		N/A
	The glow-wire test is also not carried out on small parts. These parts are to:		-
	- comprise material having a glow-wire ignition temperature of at least 775 °C or 675 °C as appropriate, or		N/A
	- comprise material having a glow-wire flammability index of at least 750 °C or 650 °C as appropriate, or		N/A
	- comply with the needle-flame test of annex E, or		N/A
	- comprise material classified as V-0 or V-1 according to IEC 60695-11-10		N/A
	The consequential needle-flame test of annex E applied to non-metallic parts that encroach within the vertical cylinder placed above the centre of the connection zone and on top of the non-metallic parts supporting current-carrying connections, and parts of non-metallic material within a distance of 3 mm of such connections if these parts are those:		-
	- parts that withstood the glow-wire test of IEC 60695-2-11 of 750 °C or 650 °C as appropriate, but produce a flame that persist longer than 2 s, or		P

EN 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	- parts that comprised material having a glow-wire flammability index of at least 750 °C or 650 °C as appropriate, or		N/A
	- small parts, that comprised material having a glow-wire flammability index of at least 750 °C or 650 °C as appropriate, or		N/A
	- small parts for which the needle-flame test of annex E was applied, or		N/A
	- small parts for which a material classification of V-0 or V-1 was applied		N/A
	However, the consequential needle-flame test is not carried out on non-metallic parts, including small parts, within the cylinder that are:		-
	- parts having a glow-wire ignition temperature of at least 775 °C or 675 °C as appropriate, or		N/A
	- parts comprising material classified as V-0 or V-1 according to IEC 60695-11-10, or		N/A
	- parts shielded by a flame barrier that meets the needle-flame test of annex E or that comprises material classified as V-0 or V-1 according to IEC 60695-11-10		N/A
30.2.4	Base material of printed circuit boards subjected to the needle-flame test of annex E		P
	Test not applicable to conditions as specified		N/A
31	RESISTANCE TO RUSTING		-
	Relevant ferrous parts adequately protected against rusting		P
	Tests specified in part 2 when necessary		P
	Salt mist test of IEC 60068-2-52, severity 2 (EN 60335-2-40)		P
	Before test, coatings are scratched by means of a harden steel pin as specified (EN 60335-2-40)		P
	Five scratches made at least 5 mm apart and at least 5 mm from the edges (EN 60335-2-40)		P
	Appliance not deteriorated to such an extent that compliance with clause 8 and 27 is impaired (EN 60335-2-40)		P
	Coating not be broken and not loosened from the metal surface (EN 60335-2-40)		P
A	ANNEX A (INFORMATIVE) ROUTINE TESTS		-

EN 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	Description of routine tests to be carried out by the manufacturer		P
B	ANNEX B (NORMATIVE) APPLIANCES POWERED BY RECHARGEABLE BATTERIES		-
	The following modifications to this standard are applicable for appliances powered by batteries that are recharged in the appliance		N/A
	This annex does not apply to battery chargers		N/A
3.1.9	Appliance operated under the following conditions:		-
	- the appliance, supplied by its fully charged battery, operated as specified in relevant part 2		N/A
	- the battery is charged, the battery being initially discharged to such an extent that the appliance cannot operate		N/A
	- if possible, the appliance is supplied from the supply mains through its battery charger, the battery being initially discharged to such an extent that the appliance cannot operate. The appliance is operated as specified in relevant part 2		N/A
	- if the appliance incorporates inductive coupling between two parts that are detachable from each other, the appliance is supplied from the supply mains with the detachable part removed		N/A
3.6.2	Part to be removed in order to discard the battery is not considered to be detachable		N/A
5.B.101	Appliances supplied from the supply mains tested as specified for motor-operated appliances		N/A
7.1	Battery compartment for batteries intended to be replaced by the user, marked with battery voltage and polarity of the terminals		N/A
	The positive terminal indicated by symbol IEC 60417-5005 and the negative terminal by symbol IEC 60417-5006		N/A
7.6	Symbols 60417-5005 and IEC 60417-5006		N/A
7.12	The instructions give information regarding charging		N/A
	The instructions for appliances incorporating batteries intended to be replaced by the user includes required information		N/A
	Details about how to remove batteries containing materials hazardous to the environment given		N/A

EN 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
7.15	Markings placed on the part of the appliance connected to the supply mains		N/A
8.2	Appliances having batteries that according to the instruction may be replaced by the user need only have basic insulation between live parts and the inner surface of the battery compartment		N/A
	If the appliance can be operated without batteries, double or reinforced insulation required		N/A
11.7	The battery is charged for the period stated in the instructions or 24 h		N/A
19.1	Appliances subjected to tests of 19.B.101, 19.B.102 and 19.B.103		N/A
19.10	Not applicable		N/A
19.B.101	Appliances supplied at rated voltage for 168 h, the battery being continually charged		N/A
19.B.102	For appliances having batteries that can be removed without the aid of a tool, short-circuit of the terminals of the battery, the battery being fully charged,		N/A
19.B.103	Appliances having batteries replaceable by the user supplied at rated voltage under normal operation with the battery removed or in any position allowed by the construction		N/A
21.B.101	Appliances having pins for insertion into socket-outlets have adequate mechanical strength		N/A
	Part of the appliance incorporating the pins subjected to the free fall test, procedure 2, of IEC 60068-2-31, the number of falls being:		-
	- 100, if the mass of the part does not exceed 250 g (g)		N/A
	- 50, if the mass of the part exceeds 250 g		N/A
	After the test, the requirements of 8.1, 15.1.1, 16.3 and clause 29 are met		N/A
22.3	Appliances having pins for insertion into socket-outlets tested as fully assembled as possible		N/A
25.13	An additional lining or bushing not required for interconnection cords in class III appliances or class III constructions operating at safety extra-low voltage not containing live parts		N/A
30.2	For parts of the appliance connected to the supply mains during the charging period, 30.2.3 applies		N/A

EN 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	For other parts, 30.2.2 applies		N/A
C	ANNEX C (NORMATIVE) AGEING TEST ON MOTORS		-
	Tests, as described, carried out when doubt with regard to the temperature classification of the insulation of a motor winding		N/A
	Test conditions as specified		N/A
E	ANNEX E (NORMATIVE) NEEDLE- FLAME TEST		-
	Needle-flame test carried out in accordance with IEC 60695-11-5, with the following modifications:		P
7	Severities		-
	The duration of application of the test flame is 30 s \pm 1 s		P
9	Test procedure		-
9.1	The specimen so arranged that the flame can be applied to a vertical or horizontal edge as shown in the examples of figure 1		P
9.2	The first paragraph does not apply		P
	If possible, the flame is applied at least 10 mm from a corner		P
9.3	The test is carried out on one specimen		P
	If the specimen does not withstand the test, the test may be repeated on two additional specimens, both withstanding the test		N/A
11	Evaluation of test results		-
	The duration of burning not exceeding 30 s		N/A
	However, for printed circuit boards, the duration of burning not exceeding 15 s		P
F	ANNEX F (NORMATIVE) CAPACITORS		-
	Capacitors likely to be permanently subjected to the supply voltage, and used for radio interference suppression or voltage dividing, comply with the following clauses of IEC 60384-14, with the following modifications:		-
1.5	Terms and definitions		-
1.5.3	Class X capacitors tested according to subclass X2		N/A
1.5.4	This subclause is applicable		N/A
1.6	Marking		-

EN 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	Items a) and b) are applicable		N/A
3.4	Approval testing		-
3.4.3.2	Table 3 is applicable as described		N/A
4.1	Visual examination and check of dimensions		-
	This subclause is applicable		N/A
4.2	Electrical tests		-
4.2.1	This subclause is applicable		N/A
4.2.5	This subclause is applicable		N/A
4.2.5.2	Only table 11 is applicable		N/A
	Values for test A apply		N/A
	However, for capacitors in heating appliances the values for test B or C apply		N/A
4.12	Damp heat, steady state		-
	This subclause is applicable		N/A
	Only insulation resistance and voltage proof are checked		N/A
4.13	Impulse voltage		-
	This subclause is applicable		N/A
4.14	Endurance		-
	Subclauses 4.14.1, 4.14.3, 4.14.4 and 4.14.7 are applicable		N/A
4.14.7	Only insulation resistance and voltage proof are checked		N/A
	No visible damage		N/A
4.17	Passive flammability test		-
	This subclause is applicable		N/A
4.18	Active flammability test		-
	This subclause is applicable		N/A
G	ANNEX G (NORMATIVE) SAFETY ISOLATING TRANSFORMERS		-
	The following modifications to this standard are applicable for safety isolating transformers:		-
7	Marking and instructions		-
7.1	Transformers for specific use marked with:		-

EN 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	- name, trademark or identification mark of the manufacturer or responsible vendor		N/A
	- model or type reference.....		N/A
17	Overload protection of transformers and associated circuits		-
	Fail-safe transformers comply with subclause 15.5 of IEC 61558-1		N/A
22	Construction		-
	Subclauses 19.1 and 19.1.2 of IEC 61558-2-6 are applicable		N/A
29	Clearances, creepage distances and solid insulation		-
29.1, 29.2, 29.3	The distances specified in items 2a, 2c and 3 in table 13 of IEC 61558-1 apply		N/A
	For insulated winding wires complying with subclause 19.12.3 of IEC 61558-1 there are no requirements for clearances or creepage distances		N/A
	For windings providing reinforced insulation, the distance specified in item 2c of table 13 of IEC 61558-1 is not assessed		N/A
	For safety isolating transformers subjected to periodic voltages with a frequency exceeding 30 kHz, the clearances, creepage distances and solid insulation values specified in IEC 60664-4 are applicable, if greater than the values specified in items 2a, 2c and 3 in table 13 of IEC 61558-1		N/A
H	ANNEX H (NORMATIVE) SWITCHES		-
	Switches comply with the following clauses of IEC 61058-1, as modified below:		-
	The tests of IEC 61058-1 carried out under the conditions occurring in the appliance		N/A
	Before being tested, switches are operated 20 times without load		N/A
8	Marking and documentation		-
	Switches are not required to be marked		N/A
	However, a switch that can be tested separately from the appliance marked with the manufacturer's name or trade mark and the type reference		N/A
13	Mechanism		-
	The tests may be carried out on a separate sample		N/A
15	Insulation resistance and dielectric strength		-

EN 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
15.1	Not applicable		N/A
15.2	Not applicable		N/A
15.3	Applicable for full disconnection and micro-disconnection		N/A
17	Endurance		-
	Compliance is checked on three separate appliances or switches		N/A
	For 17.2.4.4, the number of cycles declared according to 7.1.4 is 10 000, unless		N/A
	otherwise specified in 24.1.3 of the relevant part 2 of IEC 60335.....:		N/A
	Switches for operation under no load and which can be operated only by a tool, and		N/A
	switches operated by hand that are interlocked so that they cannot be operated under load,		N/A
	are not subjected to the tests		N/A
	However, switches without this interlock are subjected to the test of 17.2.4.4 for 100 cycles of operation		N/A
	Subclauses 17.2.2 and 17.2.5.2 not applicable		N/A
	The ambient temperature during the test is that occurring in the appliance during the test of clause 11 in IEC 60335-1		N/A
	The temperature rise of the terminals not more than 30 K above the temperature rise measured in clause 11 of IEC 60335-1 (K)		N/A
20	Clearances, creepage distances, solid insulation and coatings of rigid printed board assemblies		-
	This clause is applicable to clearances and creepage distances for functional insulation, across full disconnection and micro-disconnection, as stated in table 24		N/A
J	ANNEX J (NORMATIVE) COATED PRINTED CIRCUIT BOARDS		-
	Testing of protective coatings of printed circuit boards carried out in accordance with IEC 60664-3 with the following modifications:		N/A
5.7	Conditioning of the test specimens		-
	When production samples are used, three samples of the printed circuit board are tested		N/A

EN 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
5.7.1	Cold		-
	The test is carried out at -25 °C		N/A
5.7.3	Rapid change of temperature		-
	Severity 1 is specified		N/A
5.9	Additional tests		-
	This subclause is not applicable		N/A
K	ANNEX K (NORMATIVE) OVERVOLTAGE CATEGORIES		-
	The information on overvoltage categories is extracted from IEC 60664-1		P
	Overvoltage category is a numeral defining a transient overvoltage condition		P
	Equipment of overvoltage category IV is for use at the origin of the installation		N/A
	Equipment of overvoltage category III is equipment in fixed installations and for cases where the reliability and the availability of the equipment is subject to special requirements		N/A
	Equipment of overvoltage category II is energy consuming equipment to be supplied from the fixed installation		P
	If such equipment is subjected to special requirements with regard to reliability and availability, overvoltage category III applies		N/A
	Equipment of overvoltage category I is equipment for connection to circuits in which measures are taken to limit transient overvoltages to an appropriate low level		N/A
L	ANNEX L (INFORMATIVE) GUIDANCE FOR THE MEASUREMENT OF CLEARANCES AND CREEPAGE DISTANCES		-
	Information for the determination of clearances and creepage distances		P
M	ANNEX M (NORMATIVE) POLLUTION DEGREE		-
	The information on pollution degrees is extracted from IEC 60664-1		P
	Pollution		-

EN 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	The microenvironment determines the effect of pollution on the insulation, taking into account the macroenvironment		P
	Means may be provided to reduce pollution at the insulation by effective enclosures or similar		P
	Minimum clearances specified where pollution may be present in the microenvironment		P
	Degrees of pollution in the microenvironment		-
	For evaluating creepage distances, the following degrees of pollution in the microenvironment are established:		-
	- pollution degree 1: no pollution or only dry, non-conductive pollution occurs. The pollution has no influence		N/A
	- pollution degree 2: only non-conductive pollution occurs, except that occasionally a temporary conductivity caused by condensation is to be expected		N/A
	- pollution degree 3: conductive pollution occurs or dry non-conductive pollution occurs that becomes conductive due to condensation that is to be expected		P
	- pollution degree 4: the pollution generates persistent conductivity caused by conductive dust or by rain or snow		N/A
N	ANNEX N (NORMATIVE) PROOF TRACKING TEST		-
	The proof tracking test is carried out in accordance with IEC 60112 with the following modifications:		-
7	Test apparatus		-
7.3	Test solutions		-
	Test solution A is used		P
10	Determination of proof tracking index (PTI)		-
10.1	Procedure		-
	The proof voltage is 100 V, 175 V, 400 V or 600 V:	175V	P
	The test is carried out on five specimens		P
	In case of doubt, additional test with proof voltage reduced by 25 V, the number of drops increased to 100		N/A
10.2	Report		-

EN 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	The report states if the PTI value was based on a test using 100 drops with a test voltage of (PTI-25) V		N/A
O	ANNEX O (INFORMATIVE) SELECTION AND SEQUENCE OF THE TESTS OF clause 30		-
	Description of tests for determination of resistance to heat and fire		P
P	ANNEX P (INFORMATIVE) GUIDANCE FOR THE APPLICATION OF THIS STANDARD TO APPLIANCES USED IN WARM DAMP EQUABLE CLIMATES		-
	Modifications applicable for class 0 and 01 appliances having a rated voltage exceeding 150 V, intended to be used in countries having a warm damp equable climate and that are marked WDaE		-
	Modifications may also be applied to class 1 appliances having a rated voltage exceeding 150 V, intended to be used in countries having a warm damp equable climate and that are marked WDaE, if liable to be connected to a supply mains that excludes the protective earthing conductor		-
5.7	The ambient temperature for the tests of clauses 11 and 13 is 40 +3/0 °C		N/A
7.1	The appliance marked with the letters WDaE		N/A
7.12	The instructions state that the appliance is to be supplied through a residual current device (RCD) having a rated residual operating current not exceeding 30 mA		N/A
	The instructions state that the appliance is considered to be suitable for use in countries having a warm damp equable climate, but may also be used in other countries		N/A
11.8	The values of Table 3 are reduced by 15 K		N/A
13.2	The leakage current for class I appliances not exceeding 0,5 mA		N/A
15.3	The value of t is 37 °C		N/A
16.2	The leakage current for class I appliances not exceeding 0,5 mA (mA):		N/A
19.13	The leakage current test of 16.2 is applied in addition to the electric strength test of 16.3		N/A
Q	ANNEX Q (INFORMATIVE) SEQUENCE OF TESTS FOR THE EVALUATION OF ELECTRONIC CIRCUITS		-
	Description of tests for appliances incorporating electronic circuits		-
R	ANNEX R (NORMATIVE) SOFTWARE EVALUATION		-

EN 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
	Programmable electronic circuits requiring software incorporating measures to control the fault/error conditions specified in table R.1 or R.2 validated in accordance with the requirements of this annex		N/A
R.1	Programmable electronic circuits using software		-
	Programmable electronic circuits requiring software incorporating measures to control the fault/error conditions specified in table R.1 or R.2 constructed so that the software does not impair compliance with the requirements of this standard		N/A
R.2	Requirements for the architecture		-
	Programmable electronic circuits requiring software incorporating measures to control the fault/error conditions specified in table R.1 or R.2 use measures to control and avoid software-related faults/errors in safety-related data and safety-related segments of the software		N/A
R.2.1.1	Programmable electronic circuits requiring software incorporating measures to control the fault/error conditions specified in table R.2 have one of the following structures:		-
	- single channel with periodic self-test and monitoring		N/A
	- dual channel (homogenous) with comparison		N/A
	- dual channel (diverse) with comparison		N/A
	Programmable electronic circuits requiring software incorporating measures to control the fault/error conditions specified in table R.1 have one of the following structures:		-
	- single channel with functional test		N/A
	- single channel with periodic self-test		N/A
	- dual channel without comparison		N/A
R.2.2	Measures to control faults/errors		-
R.2.2.1	When redundant memory with comparison is provided on two areas of the same component, the data in one area is stored in a different format from that in the other area		N/A
R.2.2.2	Programmable electronic circuits with functions requiring software incorporating measures to control the fault/error conditions specified in table R.2 and that use dual channel structures with comparison, have additional fault/error detection means for any fault/errors not detected by the comparison		N/A

EN 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
R.2.2.3	For programmable electronic circuits with functions requiring software incorporating measures to control the fault/error conditions specified in table R.1 or R.2, means are provided for the recognition and control of errors in transmissions to external safety-related data paths		N/A
R.2.2.4	For programmable electronic circuits with functions requiring software incorporating measures to control the fault/error conditions specified in table R.1 or R.2, the programmable electronic circuits incorporate measures to address the fault/errors in safety-related segments and data indicated in table R.1 and R.2 as appropriate		N/A
R.2.2.5	For programmable electronic circuits with functions requiring software incorporating measures to control the fault/error conditions specified in table R.1 or R.2, detection of a fault/error occur before compliance with clause 19 is impaired		N/A
R.2.2.6	The software is referenced to relevant parts of the operating sequence and the associated hardware functions		N/A
R.2.2.7	Labels used for memory locations are unique		N/A
R.2.2.8	The software is protected from user alteration of safety-related segments and data		N/A
R.2.2.9	Software and safety-related hardware under its control is initialized and terminates before compliance with clause 19 is impaired		N/A
R.3	Measures to avoid errors		-
R.3.1	General		-
	For programmable electronic circuits with functions requiring software incorporating measures to control the fault/error conditions specified in table R.1 or R.2, the following measures to avoid systematic fault in the software are applied		-
	Software that incorporates measures used to control the fault/error conditions specified in table R.2 is inherently acceptable for software required to control the fault/error conditions specified in table R.1		N/A
R.3.2	Specification		-
R.3.2.1	Software safety requirements:	Software Id:	N/A
	The specification of the software safety requirements includes the descriptions listed		N/A
R.3.2.2	Software architecture		-

EN 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
R.3.2.2.1	The specification of the software architecture includes the aspects listed - techniques and measures to control software faults/errors (refer to R.2.2); - interactions between hardware and software; - partitioning into modules and their allocation to the specified safety functions; - hierarchy and call structure of the modules (control flow); - interrupt handling; - data flow and restrictions on data access; - architecture and storage of data; - time-based dependencies of sequences and data	Document ref. No:	N/A
R.3.2.2.2	The architecture specification is validated against the specification of the software safety requirements by static analysis		N/A
R.3.2.3	Module design and coding		-
R.3.2.3.1	Based on the architecture design, software is suitably refined into modules		N/A
	Software module design and coding is implemented in a way that is traceable to the software architecture and requirements		N/A
R.3.2.3.2	Software code is structured		N/A
R.3.2.3.3	Coded software is validated against the module specification by static analysis		N/A
	The module specification is validated against the architecture specification by static analysis		N/A
R.3.3.3	Software validation		-
	The software is validated with reference to the requirements of the software safety requirements specification		N/A
	Compliance is checked by simulation of:		-
	- input signals present during normal operation		N/A
	- anticipated occurrences		N/A
	- undesired conditions requiring system action		N/A

EN 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict

TABLE R.1						
Component ^a	Fault/error	Acceptable measures ^{b, c}	Definitions	Document reference for applied measure	Document reference for applied test	Ver-dict
1 CPU 1.1 Registers	Stuck at	Functional test, or periodic self-test using either: - static memory test, or - word protection with single bit redundancy	H.2.16.5 H.2.16.6 H.2.19.6 H.2.19.8.2			N/A
1.2 VOID						N/A
1.3 Programme counter	Stuck at	Functional test, or Periodic self-test, or Independent time-slot monitoring, or Logical monitoring of the programme sequence	H.2.16.5 H.2.16.6 H.2.18.10.4 H.2.18.10.2			N/A
2 Interrupt handling and execution	No interrupt or too frequent interrupt	Functional test, or time-slot monitoring	H.2.16.5 H.2.18.10.4			N/A
3 Clock	Wrong frequency (for quartz synchronized clock: harmonics / sub-harmonics only)	Frequency monitoring, or time slot monitoring	H.2.18.10.1 H.2.18.10.4			N/A
4. Memory 4.1 Invariable memory	All single bit faults	Periodic modified checksum, or multiple checksum, or word protection with single bit redundancy	H.2.19.3.1 H.2.19.3.2 H.2.19.8.2			N/A
4.2 Variable memory	DC fault	Periodic static memory test, or word protection with single bit redundancy	H.2.19.6 H.2.19.8.2			N/A

EN 60335-2-40						
Clause	Requirement + Test			Result - Remark		Verdict
4.3 Addressing (relevant to variable and invariable memory)	Stuck at	Word protection with single bit redundancy including the address	H.2.19.8.2			N/A
5 Internal data path	Stuck at	Word protection with single bit redundancy	H.2.19.8.2			N/A
5.1 VOID						N/A
5.2 Addressing	Wrong address	Word protection with single bit redundancy including the address	H.2.19.8.2			N/A
6 External communication	Hamming distance 3	Word protection with multi-bit redundancy, or CRC – single work, or Transfer redundancy, or Protocol test	H.2.19.8.1 H.2.19.4.1 H.2.18.2.2 H.2.18.14			N/A
6.1 VOID						N/A
6.2 VOID						N/A
6.3 Timing	Wrong point in time Wrong sequence	Time-slot monitoring, or scheduled transmission Time-slot and logical monitoring, or comparison of redundant communication channels by either: - reciprocal comparison - independent hardware comparator Logical monitoring, or time-slot monitoring, or Scheduled transmission	H.2.18.10.4 H.2.18.18 H.2.18.10.3 H.2.18.15 H.2.18.3 H.2.18.10.2 H.2.18.10.4 H.2.18.18			N/A
7 Input/output periphery	Fault conditions specified in 19.11.2	Plausibility check	H.2.18.13			N/A
7.1 VOID						N/A

EN 60335-2-40						
Clause	Requirement + Test			Result - Remark		Verdict
7.2 Analog I/O						N/A
7.2.1 A/D and D/A- converter	Fault conditions specified in 19.11.2	Plausibility check	H.2.18.13			
7.2.2 Analog multiplexer	Wrong addressin g	Plausibility check	H.2.18.13			N/A
8 VOID						N/A
9 Custom chips ^d e.g. ASIC, GAL, gate array	Any output outside the static and dynamic functional specificati on	Periodic self-test	H.2.16.6			N/A

NOTE A Stuck-at fault model denotes a fault model representing an open circuit or a non-varying signal level. A DC fault model denotes a stuck-at fault model incorporating short circuit between signal lines.

- ^{a)} For fault/error assessment, some components are divided into their sub-functions.
^{b)} For each sub-function in the table, the Table R.2 measure will cover the software fault/error.
^{c)} Where more than one measure is given for a sub-function, these are alternatives.
^{d)} To be divided as necessary by the manufacturer into sub-functions.
^{e)} Table R.1 is applied according to the requirements of R.1 to R.2.2.9 inclusive.

AA	ANNEX AA (INFORMATIVE) (EN 60335-2-40) EXAMPLES FOR OPERATING TEMPERATURES OF THE APPLIANCE	-
-----------	--	---

BB	ANNEX BB (NORMATIVE) (EN 60335-2-40) SELECTED INFORMATION ABOUT REFRIGERANTS	-
-----------	---	---

CC	ANNEX CC (INFORMATIVE) (IEC/EN 60335-2-40/A1) TRANSPORTATION, MARKING AND STORAGE FOR UNITS THAT EMPLOY FLAMMABLE REFRIGERANTS		-
CC.1	Transport of equipment containing flammable refrigerants (EN 60335-2-40/A1)		N/A
CC.2	Marking of equipment using signs (EN 60335-2-40/A1)		N/A
CC.3	Disposal of equipment using flammable refrigerants (EN 60335-2-40/A1)		N/A

EN 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict
CC.4	Storage of equipment/appliances (EN 60335-2-40/A1)		N/A
CC.5	Storage of packed (unsold) equipment (EN 60335-2-40/A1)		N/A

DD	ANNEX DD (NORMATIVE) (IEC/EN 60335-2-40/A1) SERVICE OPERATIONS		-
DD.1	Generals (EN 60335-2-40/A1)		N/A
DD.2	Symbols (EN 60335-2-40/A1)		N/A
DD.3	Information in manual (EN 60335-2-40/A1 corr.1)		N/A
DD.4	Information on servicing (EN 60335-2-40/A1)		N/A
DD.5	Repairs to sealed components (EN 60335-2-40/A1)		N/A
DD.6	Repair to intrinsically safe components (EN 60335-2-40/A1)		N/A
DD.7	Cabling (EN 60335-2-40/A1)		N/A
DD.8	Detection of flammable refrigerants (EN 60335-2-40/A1)		N/A
DD.9	Leak detection methods (EN 60335-2-40/A1)		N/A
DD.10	Removal and evacuation (EN 60335-2-40/A1)		N/A
DD.11	Charging procedures (EN 60335-2-40/A1)		N/A
DD.12	Decommissioning (EN 60335-2-40/A1)		N/A
DD.13	Labelling (EN 60335-2-40/A1)		N/A
DD.14	Recovery (EN 60335-2-40/A1)		N/A

EE	ANNEX EE (NORMATIVE) (IEC/EN 60335-2-40/A1) PRESSURE TESTS		-
EE.1	General (IEC 60335-2-40/A1)		P
EE.2	Pressure test value determined under testing carried out in clause 11 (IEC 60335-2-40/A1)		P
EE.3	Pressure test value determined under testing carried out in clause 19 (IEC 60335-2-40/A1)		P
EE.4	Pressure test value determined under testing carried out under standstill conditions (IEC 60335-2-40/A1)		P
EE.5	Fatigue test option for Clauses EE.1 and EE.4.1 (IEC 60335-2-40/A1)		N/A

EN 60335-2-40			
Clause	Requirement + Test	Result - Remark	Verdict

FF	ANNEX FF (NORMATIVE) (IEC/EN 60335-2-40/A1) LEAK SIMULATION TESTS		-
FF.1	General (EN 60335-2-40/A1)		N/A
FF.2	Test methods (EN 60335-2-40/A1 corr.1)		N/A

GG	ANNEX GG (NORMATIVE) (IEC/EN 60335-2-40/A1) CHARGE LIMITS, VENTILATION REQUIREMENTS AND REQUIREMENTS FOR SECONDARY CIRCUITS		-
GG.1	Requirements for charge limits in ventilated areas (IEC 60335-2-40/A1 Corr.1)		N/A
GG.2	Requirements for charge limits in unventilated areas (IEC 60335-2-40/A1 Corr.1)		N/A
GG.3	Requirements for charge limits in areas with mechanical ventilation (IEC 60335-2-40/A1)		N/A
GG.4	Requirements for mechanical ventilation within the appliance enclosure (IEC 60335-2-40/A1)		N/A
GG.5	Requirements for mechanical ventilation for rooms complying with ISO 5149 (IEC 60335-2-40/A1)		N/A
GG.6	Requirements for refrigeration systems employing secondary heat exchangers (IEC 60335-2-40/A1 Corr.1)		N/A
GG.7	The appliance shall then be tested with a maximum water flow under the conditions described in g) (IEC 60335-2-40/A1)		N/A

10.1	TABLE: Power input deviation					P
	Input deviation of/at:	P rated (W)	P measured (W)	dP	Required dP	Remark
	380V/50Hz	4210	4150.3	-1.42%	-10%	P
	380V/60Hz	4210	4197.5	-2.97%	-10%	P
	420V/50Hz	4210	4075.6	-3.19%	-10%	P
	420V/60Hz	4210	4088.9	-2.88%	-10%	P

10.2	TABLE : Current deviation					N
	Current deviation of/at:	I rated (A)	I measured (A)	Di	Required Di	Remark
	-	-	-	-	-	-

11.8	TABLE: Heating test, thermocouples					P
	Test voltage (V)	254.4V				—
	Ambient (°C)	24.9				—
	Thermocouple locations	Dt (K)		Max. Dt (K)		
	Power cord	8.5		50		
	Surface of motor	52.3		85		
	Motor brush holder (Phenolic material)	29.8		Ref		
	Internal wire, near motor	32.6		T105-25=80		
	Y Capacitor (CY1)	25.3		T85-25=60		
	Filter board PCB	31.9		T130-25=105		
	Transformer winding	52.8		85		
	Transformer bobbin	46.5		For cl.30		
	Ambient of power switch	13.6		T85-25=60		
	Ambient of Interlock switch	12.4		T85-25=60		
	Terminal	25.6		For cl.30		
	Metal enclosure, outside, near motor	20.5		50		
	Power switch knob	5.0		75		
	Test support	3.9		65		

13.2	TABLE: Leakage current					P
	Heating appliances: 1.15 x rated input..... :					—
	Motor-operated and combined appliances: 1.06 x rated voltage	254.4V				—
	Leakage current between	I (mA)		Max. allowed I (mA)		
	Live parts and accessible parts over reinforced insulation	0.005		0.35 peak		
	Live parts and accessible metal enclosure	0.01		0.75		

13.3	TABLE: Electric strength		P
Test voltage applied between:		Voltage (V)	Breakdown (Yes/No)
Live parts and accessible parts over reinforced insulation		3000	No
Live parts and accessible metal enclosure basic insulation		1000	No

16.2	TABLE: Leakage current		P
	Single phase appliances: 1.06 x rated voltage :	254.4V	—
	Three phase appliances 1.06 x rated voltage divided by $\sqrt{3}$:.....:	-	—
Leakage current between		I (mA)	Max. allowed I (mA)
Live parts and accessible parts over reinforced insulation		0.005	0.35 peak
Live parts and accessible metal enclosure		0.01	0.75

16.3	TABLE: Electric strength		P
Test voltage applied between:		Voltage (V)	Breakdown (Yes/No)
Live parts and accessible parts over reinforced insulation		3000	No
Live parts and accessible metal enclosure		1250	No

Kind of component / Bauteil	Manufacturer / Hersteller	Mechanical, electrical and chemical specification / Mechanische, elektrische und chemische Spezifikation			Test report and/or mark from / Prüfbericht und /oder -zeichen von
Object / part No.	Manufacturer/ trademark	Type / model	Technical data	Standard	Mark(s) of conformity
Terminal block (5 bit)	ZHONGSHAN SHI JOINTEC ELECTRONICS CO., LTD.	RS9101	450V; 4mm ²	EN 60335-2-40	Tested with appliance
Terminal block for internal wire	ZHONGSHAN SHI JOINTEC ELECTRONICS CO., LTD.	RS9211K (LJD-D-17041)	450V; 4mm ²	EN 60335-2-40	Tested with appliance
Motor-compressor	Panasoinc Wanbao Appliances Compressor (Guangzhou) Co.Ltd	5VD420ZAA21	DC30-190V; 30-360Hz; 4410W; 8.5A; R410A	EN 60335-1 EN 60335-2-34 EN 60335-2-40	Tested with appliance & TUV R 50307930

Fan motor	Wolong Electric Group Co., Ltd	ZWB278D04A	DC195V~384V; 102W; 8P; 920r/min IP24 Class E;	EN 60335-2-40	Tested with appliance
Motor thermal protector	Jiangsu Changsheng Electric Appliance Co., Ltd.	BW-T	AC250V; 6A; Tf: 130°C; operation cycles: 10000	EN 60730-2-2 EN 60730-1	VDE 4004087 3
Lead wire for motor-compressor	Foshan Dadu Zhengping Wire & Cable Co., Ltd.	1015	14AWG; 600V; 105°C	EN 60335-2-40	Tested with appliance
Lead wire for fan motor	Heshan Tehsing Huanchiu Electric Cable Co., Ltd.	1015	20AWG; 600V; 105°C	EN 60335-2-40	Tested with appliance
Internal wire	Guangdong Zhoushishenlong Wire Manufacture Co., Ltd.	1015	16/18/20AWG; 600V; 105°C	EN 60335-2-40	Tested with appliance
4-ways valve	ZHEJIANG SANHUA INTELLIGENT CONTROLS CO., LTD.	SHF-20D-46-04	220-240V; 50/60Hz; 7/5W; Class B	EN 60730-1	VDE 4004807 7
High pressure switch	/	/	/	EN 60335-2-40	
Low pressure switch	/	/	/	EN 60335-2-40	
High pressure sensor	CAREL INDUSTRIES S.p.A.	SPKT00B6P0	5VDC±10%; 0-45,0 barG; 0-650,0 psiG; T135°C	EN 60335-2-40	Tested with appliance & UL E493623
Low pressure sensor	CAREL INDUSTRIES S.p.A.	SPKT0033P0	5VDC±10%; 0-34,5 barG; 0-500,0 psiG; T135°C	EN 60335-2-40	Tested with appliance & UL E493623
Electric expansion valve	CAREL INDUSTRIES S.p.A.	E2V18FAC1	12VDC; 3W	EN 60335-2-40	Tested with appliance
Flow switch	FOSHAN SHUNDE JINGRUI ELECTRIC CO., LTD	JR-B668	DC3,3V; 0,12A	EN 60335-2-40	Tested with appliance
Controller board	CAREL INDUSTRIES S.p.A.	PLD00GFP00 (SEM.98C737SD 01/SD31)	--	EN 60335-2-40	Tested with appliance
PCB material	KUNSHAN HUATAO ELECTRONICS CO LTD	14921E	FR4; V-0; 130°C	EN 60335-2-40	Tested with appliance & UR E318580
Alternative	TECNOMECC Srl	14921E	FR4; V-0; 130°C	EN 60335-2-40	Tested with appliance & UR

					E320829
Components on main board UP3A00200T3S0					
Main board	CAREL INDUSTRIES S.p.A.	UP3A00200T3S0	110-230VAC	EN 60335-2-40	Tested with appliance
Main PCB material	KUNSHAN HUATAO ELECTRONICS CO LTD	CAREL 14918C	FR4; V-0; 130°C	EN 60335-2-40	Tested with appliance
Relay 1 (K13,K14,K15,K20,K21,K3,K4,K7)	Xiamen Hongfa Electroacoustic Co., Ltd	HF46F-G	250VAC; 7A; 30VDC; 1E5; T85	EN 61810-1	VDE 40025215
Relay 2 (K1)	Xiamen Hongfa Electroacoustic Co., Ltd	HF32FA	250VAC; 5A; 12VDC; 1E5; T85	EN 61810-1	VDE 40006182
Switching power supply board for main board	CAREL INDUSTRIES S.p.A.	98H007C072	220-240VAC	EN 60335-2-40	Tested with appliance
PCB material	KUNSHAN HUATAO ELECTRONICS CO LTD	CAREL 14917C	FR4; V-0; 130°C	EN 60335-2-40	Tested with appliance
Transformer (TM1)	ZHENJIANG HONGLIAN ELECTRIC APPLIANCES CO., LTD	09H007A006	Input: 100-240VAC; Output: 5-10VAC; Class B	EN 60335-2-40	Tested with appliance
X2 Capacitor (C2)	TDK Electronics AG	Series B3292*	330nF; 275 VAC; X2; T110	EN 60384-14	VDE 40030986
Alternative	KEMET Electronics Corporation	Series R46	330nF; 275 VAC; X2; T110	EN 60384-14	ENEC 15
Varistor (V1)	TDK Electronics GmbH & Co OG	S14K275	275VAC; Type 4; T85°C	EN 61051-1 EN 61051-2 EN 61051-2-2	VDE 40027582
Fuse (RP1)	Conquer Electronics Co., Ltd.	MST3.15250	T; 3,15A; 250VAC; H	EN 60127-1 EN 60127-3	VDE 40017118
Optocoupler (IC2, IC3)	VISHAY Semiconductor GmbH	VOL628A	5000VAC; T110°	EN 60747-5-5	VDE 132473
Y2 Capacitor (C26,C27,C30,C31)	Vishay Intertechnology, Inc.	Series MKP336 6	2,2nF; 300VAC; Y2; -55T105°C	IEC 60384-14	ENEC 16/FI/19/10005
Alternative	TDK Electronics AG	Series B3202	2,2nF; 300VAC; Y2; -55T110°C	IEC 60384-14	VDE 40018909
Alternative	KEMET Electronics Corporation	Series R41	2,2nF; 300VAC; Y2; -55T110°C	IEC 60384-14	ENEC 15
Electrolytic	Lelon Electronics Corp.	RXC series	Electrolytic 400V;	EN 60335-	Tested

capacitor (C5)			47uF; T105	2-40	with appliance
Screw terminal block (M15,M16,M21, M22,M50,M54,M55,M67)	SAURO SRL	MSG02001 Black color	300V; 17,5A; T105; Polymeric materials traced via VDE report	EN 60335-2-40 EN 60998-1	Tested with appliance & VDE 4001624 3
Screw terminal block (M34,M35,M48, M49,M64,M65,M66,M99,M5)	SAURO SRL	MSG03001 Black color	300V; 17,5A; T105; Polymeric materials traced via VDE report	EN 60335-2-40 EN 60998-1	Tested with appliance & VDE 4001624 3
Plug in terminal block	DEGSON	2EDGRC-5.08-04P	300V; 15A; T105	EN 60335-2-40	Tested with appliance
Alternative	SAURO SRL	CIM Male type	300V; 15A; T105	EN 60335-2-40	Tested with appliance
Alternative	SAURO SRL	CIM049P5 Male type	300V; 15A; T105	EN 60335-2-40	Tested with appliance
Alternative	DEGSON	2EDGRC-5.08-03P	300V; 15A; T105	EN 60335-2-40	Tested with appliance
Alternative	SAURO SRL	CIM029P5 Male type	300V; 15A; T105	EN 60335-2-40	Tested with appliance
Alternative	DEGSON	2EDGRC-5.08-09P	300V; 15A; T105	EN 60335-2-40	Tested with appliance
Alternative	SAURO SRL	CIM099P5 Male type	300V; 16A; T105	EN 60335-2-40	Tested with appliance
Alternative	DEGSON	2EDGRC-5.08-08P	300V; 16A; T105	EN 60335-2-40	Tested with appliance
Alternative	SAURO SRL	CIM089P5 Male type	300V; 16A; T105	EN 60335-2-40	Tested with appliance
Plug in terminal block (M38,M61)	DEGSON	15EDGVC-3.81-03P Male type	300V; 8A; T105	EN 60335-2-40	Tested with appliance
Plug in terminal block (M60)	DEGSON	15EDGVC-3.81-04P Male type	300V; 8A; T105	EN 60335-2-40	Tested with appliance
Terminal block tabs (M104,M105,M106,M109,M110,	FITTINGS	CQSA3800LX	Polymeric material traced	EN 60335-2-40	Tested with appliance

M111)					
Terminal block tabs (M100,M101,M102)	FITTINGS	CQSA4800LX	Polymeric material traced	EN 60335-2-40	Tested with appliance
Components on compressor drive board PS20016210100					
Compressor drive board	CAREL INDUSTRIES S.p.A.	PS20016210100	--	EN 60335-2-40 IEC 60730-1	Tested with appliance & UL 19-4788959 477-5
PCB version	CAREL INDUSTRIES S.p.A.	98C739C004	16A	EN 60335-2-40 IEC 60730-1	Tested with appliance & UL 19-4788959 477-5
PCB material	KUNSHAN HUATAO ELECTRONICS CO LTD	CAREL 14937G	FR4; V-0; 130°C	EN 60335-2-40	Tested with appliance
Alternative	TECNOMECC. S.R.L	CAREL 14937G	FR4; V-0; 130°C	EN 60335-2-40	Tested with appliance & UL E146387
Transformer (T1)	Marini Mario & C. s.n.c.	09C739A105	In: 200-240VAC; 50/60Hz; 32-28A; Out: 0-In V 3~ 0-500Hz; 16A	EN 60335-2-40	Tested with appliance & UL E41871
Alternative	PMA Prozeß- und Maschinen-Automation GmbH	09C739A105	In:200-240VAC; 50/60Hz; 32-28A; Out:0-In V 3~ 0-500Hz; 16A	EN 60335-2-40	Tested with appliance
Relay (RL2)	American Zettler Inc.	AZ2150-1A-12DEF	25A; 250VAC; 40A; 250VAC; 20A ; 30VDC; 1E4; T85; Class F	EN 61810-1 EN 60079-15	VDE 4002315 4
X2 capacitor (C1,C4,C156)	TDK (Zhuhai FTZ) Co., Ltd.	B3292 Series	305V~; X2 ; 2,2uF; T105	EN 60384-14	VDE 4001069 4
Alternative	Xiamen Faratronic Co. Ltd.	MKP-62	305V~; X2 ; 2,2uF; T105	EN 60384-14	VDE 4000035 8
Electrolytic capacitor (C122,C124,C127)	KENDEIL SRL	K95 series	Electrolytic 420V; 680uF; T105	EN 60335-2-40	Tested with appliance
Alternative	Nantong Jianghai	CD 296 series	Electrolytic 420V;	EN 60335-	Tested

	Capacitor Co., Ltd.		680uF; T105	2-40	with appliance
Y2 capacitor I (C2,C3)	XIAMEN FARATRONIC CO LTD	MKP63	300VAC; Y2; 10nF; T110	EN 60384-14	SEMKO(SE/0366-2)
Alternative	COWELL FASHION CO LTD PILKOR ELECTRONICS	PCY2 series	300VAC; Y2; 10nF; T110	EN 60384-14	SEMKO(SE/0256-5H)
Y2 capacitor II (C154,C155)	TDK (Zhuhai FTZ) Co., Ltd.	B3202 series	300VAC; Y2; 220nF; T110; MKP; pitch 22,5mm (I=20mA)	EN 60384-14	VDE 4001890 9
Y2 capacitor III (C5,C6)	TDK (Zhuhai FTZ) Co., Ltd.	B3202 series	300VAC; Y2; 15nF; T110; MKP; pitch 15mm(I=1,4mA)	EN 60384-14	VDE 4001890 9
Varistor (VR1,VR2)	TDK Electronics GmbH & Co OG	S20K275E3K1 (B72220P3271K 101)	Vpr 900V; 275VAC; SPD; Type 2,5ka	EN 61051-1 EN 61051-2 EN 61051-2-2	VDE 4002758 2
Alternative	BestBright Electronics Co. Ltd	20D431K	MLV 960V; 275VAC; SPD Type 5,3KA	EN 61051-1 EN 61051-2 EN 61051-2-2	VDE 4000585 8
PFC Inductor (L10)	Marini Mario & C. s.n.c.	09C739A102	357uH +/- 12%; 0,016Ohm	EN 60335-2-40	Tested with appliance
Alternative	(PMA Prozeß- und Maschinen-Automation GmbH)	09C739A102	357uH +/- 12%; 0,016Ohm	EN 60335-2-40	Tested with appliance
Capacitor (C116,C128)	XIAMEN FARATRONIC CO LTD	C35 series	630V; 1nF; T105	EN 60384-16	Tested with appliance
Alternative	KEMET Electronics Corporation	R71P series	630V; 1nF; T110	EN 60384-16	Tested with appliance
Mode Inductor (FL1)	Marini Mario & C. s.n.c.	09C739A104	2*1mH; 30A	EN 60335-2-40	Tested with appliance
Mode Inductor (FL3)	Marini Mario & C. s.n.c.	09C739A100	2*6,4uH	EN 60335-2-40	Tested with appliance
Mode Inductor (FL2)	Marini Mario & C. s.n.c.	09C739A103	2*1mH; 30A	EN 60335-2-40	Tested with appliance
Optocoupler (ISO6, ISO7)	VISHAY Semiconductor GmbH	TCLT1104	5000VAC; T110	EN 60747-5-5	VDE 132473

Alternative	Everlight Electronics Co., Ltd.	EL1114-V	5000VAC; T110	EN 60747-5-5	VDE 4002839 1
Sensing thermistor (NTC3)	Murata Manufacturing Co., Ltd.	NCP18XH103F0 3RB	NTC 10K@25C	EN 60335-2-40	Tested with appliance & UL E183718 8
Optocoupler (ISO2, ISO5, IC3)	Toshiba Electronic Devices & Storage Corporation	TLP2768F Option D4	5000VAC; T125	EN 60747-5-5	VDE 4000930 2
Alternative	Lite-On Technology Corporation	LTV-60LW	5000VAC; T110	EN 60747-5-5	VDE 4002778 8
IMS Board	CAREL INDUSTRIES S.p.A.	SEM.98C739SD 05	--	EN 60335-2-40	Tested with appliance
PCB material	The Bergquist Company	14934C	FR4; V-0; 130°C	EN 60335-2-40	Tested with appliance
Sensing thermistor (NTC1, NTC2)	Murata Manufacturing Co., Ltd.	NCP18XH103F0 3 RB	NTC 10K@25C	EN 60335-2-40	Tested with appliance & cURus (E137188)

29.1	TABLE: Clearances Overvoltage category					P
Rated impulse voltage (V)	Min. cl (mm)	Type of insulation				Verdict
		Basic	Functional	Supplementary	Reinforced	
330	0.5	-	-	-	-	N
550	0.5	-	-	-	-	N
800	0.5	-	-	-	-	N
1500	0.5	-	-	-	-	N
2500	1.5	P	P	P		P
4000	3.0	-	-	-	P	P
6000	5.5	-	-	-	-	N
8000	8.0	-	-	-	-	N
10000	11	-	-	-	-	N
supplementary information:						

29.2	TABLE: Creepage distances, basic, supplementary and reinforced insulation										P
Working voltage (V)	Creepage distance (mm) Pollution degree										
	1	2			3			Type of insulation			
		Material group			Material group						
		I	II	IIIa/IIIb	I	II	IIIa/IIIb	B*)	S*)	R*)	Ver dict
≤50	0,2	0,6	0,9	1,2	1,5	1,7	1,9	—	—	—	
>50 and ≤125	0,3	0,8	1,1	1,5	1,9	2,1	2,4	—	—	—	
>125 and ≤250	0,6	1,3	1,8	2,5	3,2	3,6	4,0	P	—	—	P
>125 and ≤250	0,6	1,3	1,8	2,5	3,2	3,6	4,0	—	P	—	P
>125 and ≤250	1,2	2,6	3,6	5,0	6,4	7,2	8,0	—	—	P	P
>250 and ≤400	1,0	2,0	2,8	4,0	5,0	5,6	6,3	—	—	—	
>400 and ≤500	2,6	5,0	7,2	10,0	12,6	14,2	16,0	—	—	—	
>500 and ≤800	3,6	6,4	9,0	12,6	16,0	18,0	20,0	—	—	—	
>800 and ≤1000	2,4	4,0	5,6	8,0	10,0	11,0	12,5	—	—	—	
>1000 and ≤1250	3,2	5,0	7,1	10,0	12,5	14,0	16,0	—	—	—	
>1250 and ≤1600	8,4	12,6	18,0	25,0	32,0	36,0	40,0	—	—	—	
>1600 and ≤2000	5,6	8,0	11,0	16,0	20,0	22,0	25,0	—	—	—	
>2000 and ≤2500	15,0	20,0	28,0	40,0	50,0	56,0	64,0	—	—	—	
>2500 and ≤3200	10,0	12,5	18,0	25,0	32,0	36,0	40,0	—	—	—	
>3200 and ≤4000	25,0	32,0	44,0	64,0	80,0	90,0	100,0	—	—	—	
>4000 and ≤5000	16,0	20,0	28,0	40,0	50,0	56,0	63,0	—	—	—	
>5000 and ≤6300	20,0	25,0	36,0	50,0	63,0	71,0	80,0	—	—	—	
>6300 and ≤8000	25,0	32,0	45,0	63,0	80,0	90,0	100,0	—	—	—	
>8000 and ≤10000	64,0	80,0	112,0	160,0	200,0	220,0	250,0	—	—	—	
>10000 and ≤12500	40,0	50,0	71,0	100,0	125,0	140,0	160,0	—	—	—	
*), B=Basic, S=Supplementary and R=Reinforced											

29.2	TABLE: Creepage distances, functional insulation							P
Working voltage (V)	Creepage distance (mm) Pollution degree							
	1	2		3				
	Material group			Material group				
	I	II	IIIa/IIIb	I	II	IIIa/IIIb		Verdict
≤50	0,2	0,6	0,8	1,1	1,4	1,6	1,8	
>50 and ≤125	0,3	0,7	1,0	1,4	1,8	2,0	2,2	
>125 and ≤250	0,4	1,0	1,4	2,0	2,5	2,8	3,2	P
>250 and ≤400	0,8	1,6	2,2	3,2	4,0	4,5	5,0	
>400 and ≤500	1,0	2,0	2,8	4,0	5,0	5,6	6,3	
>500 and ≤800	1,8	3,2	4,5	6,3	8,0	9,0	10,0	
>800 and ≤1000	2,4	4,0	5,6	8,0	10,0	11,0	12,5	
>1000 and ≤1250	3,2	5,0	7,1	10,0	12,5	14,0	16,0	
>1250 and ≤1600	4,2	6,3	9,0	12,5	16,0	18,0	20,0	
>1600 and ≤2000	5,6	8,0	11,0	16,0	20,0	22,0	25,0	
>2000 and ≤2500	7,5	10,0	14,0	20,0	25,0	28,0	32,0	
>2500 and ≤3200	10,0	12,5	18,0	25,0	32,0	36,0	40,0	
>3200 and ≤4000	12,5	16,0	22,0	32,0	40,0	45,0	50,0	
>4000 and ≤5000	16,0	20,0	28,0	40,0	50,0	56,0	63,0	
>5000 and ≤6300	20,0	25,0	36,0	50,0	63,0	71,0	80,0	
>6300 and ≤8000	25,0	32,0	45,0	63,0	80,0	90,0	100,0	
>8000 and ≤10000	32,0	40,0	56,0	80,0	100,0	110,0	125,0	
>10000 and ≤12500	40,0	50,0	71,0	100,0	125,0	140,0	160,0	

30.1	TABLE: Ball Pressure Test of Thermoplastics			P
Allowed impression diameter (mm) :		2		—
Object/ Part No./ Material	Manufacturer/ trademark	Test temperature (°C)	Impression diameter (mm)	
Plastic enclosure	See Table 24.1	75	0.9	
Switch	See Table 24.1	125	1.3	
Supplementary information:				

30.2	TABLE: Resistance to heat and fire - Glow wire tests							P
Object/ Part No./ Material	Manufacturer / trademark	Glow wire test (GWT); (°C)						Verdict
		550	650		750		850	
			te	ti	te	ti		
Plastic enclosure	See Table 24.1	No flame	--	--	--	--	--	P
Switch	See Table 24.1	--	--	--	0	0	--	P
Object/ Part No./ Material	Manufacturer / trademark	Glow-wire flammability index (GWFI), °C				GW ignition temp. (GWIT), °C		Verdict
		550	650	750	850	675	775	
The test specimen passed the glow wire test (GWT) with no ignition [(te – ti) ≤ 2s] (Yes/No):								Yes
If no, then surrounding parts passed the needle-flame test of annex E (Yes/No)								N/A
The test specimen passed the test by virtue of most of the flaming material being withdrawn with the glow-wire (Yes/No)?								Yes
Ignition of the specified layer placed underneath the test specimen (Yes/No).....								No
Supplementary information:								
- 550 °C GWT not relevant (or applicable) to parts of material classified at least HB40 or if relevant HBF								
- The GWIT pre-selection option, the 850 °C GWFI pre-selection option, and the 850 °C GWT are not relevant (or applicable) for attended appliances								

Photo-documentation











***** END OF REPORT *****