


G600F

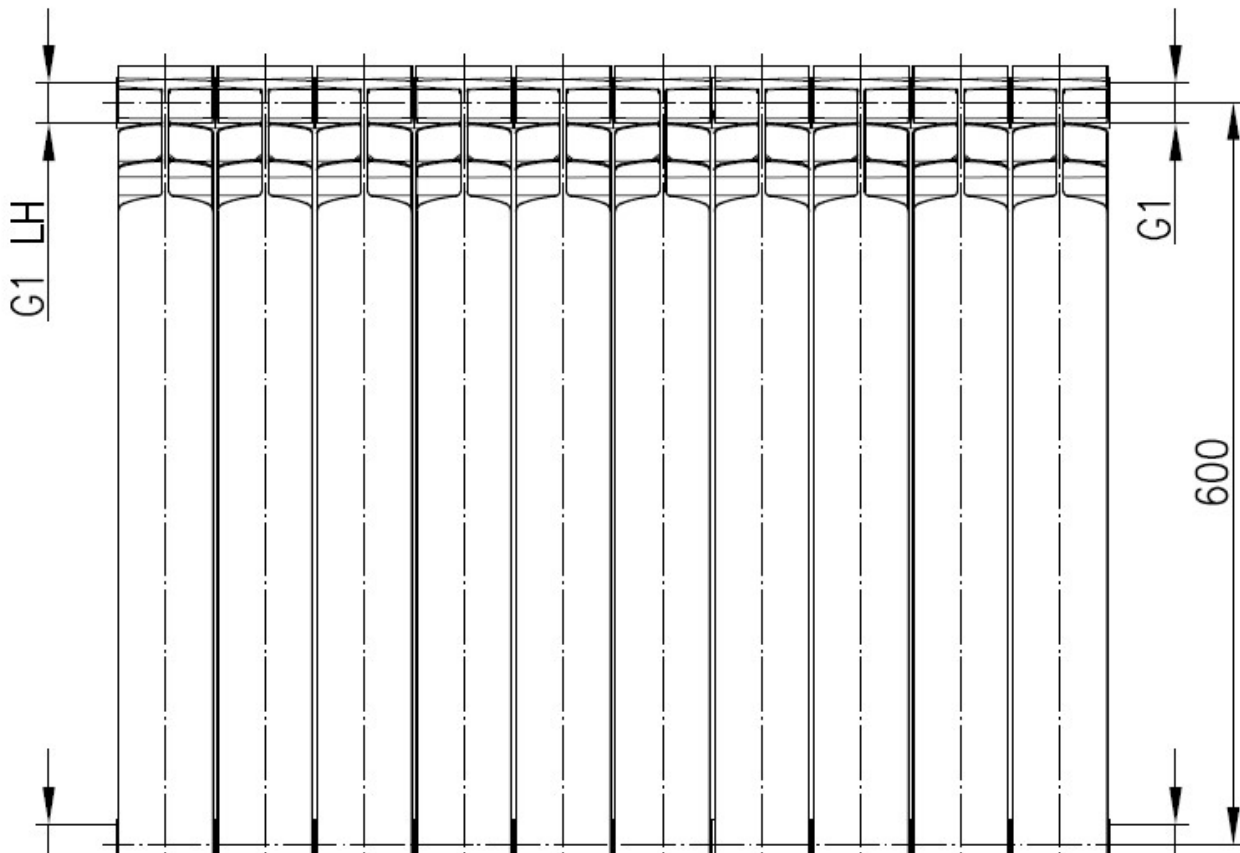

Technical data of the 10-piece set

Total section height	672,0 mm
Total width	805,0 mm
Section depth	90,0 mm
Assembly height	600,0 mm
Water content	3,5 dm ³
Total section weight	14,7 kg
Max water temperature	95 °C
Operating pressure up to	20 bar
Thermal Capacity Of One Section For ($\Delta T = (t_{we} + t_{wy}) / 2 - t_{ot}$):	
For $\Delta T = 30^{\circ}\text{C}$, $t_{we} = 55^{\circ}\text{C}$, $t_{wy} = 45^{\circ}\text{C}$, $t_{ot} = 20^{\circ}\text{C}$	675,0 W
For $\Delta T = 50^{\circ}\text{C}$, $t_{we} = 75^{\circ}\text{C}$, $t_{wy} = 65^{\circ}\text{C}$, $t_{ot} = 20^{\circ}\text{C}$	1313,0 W
For $\Delta T = 60^{\circ}\text{C}$, $t_{we} = 90^{\circ}\text{C}$, $t_{wy} = 70^{\circ}\text{C}$, $t_{ot} = 20^{\circ}\text{C}$	1665,0 W
Thermal characteristics (equation of thermal characteristics), n - number of elements	$\Phi = (n/10) \cdot 8,0230 \cdot \Delta T^{1,3031}$
Warranty	20 years
Index	772-100-44
Color:	White, RAL 9010